

GENERAL DESCRIPTION OF MODEL 9602-I

Version 1.0

May 10, 2010



LEGAL DISCLAIMER AND CONDITIONS OF USE

This document contains information for the Iridium 9602-I Short Burst Data Transceiver and accompanying accessories ("Product") is provided "as is." Reasonable effort has been made to make the information in this document reliable and consistent with specifications, test measurements and other information. However, NAL Research Corporation and its affiliated companies, directors, officers, employees, agents, trustees or consultants ("NAL Research") assume no responsibility for any typographical, technical, content or other inaccuracies in this document. NAL Research reserves the right in its sole discretion and without notice to you to change Product specifications and materials and/or revise this document or withdraw it at any time. User assumes the full risk of using the Product specifications and any other information provided.

NAL Research makes no representations, guarantees, conditions or warranties, either express or implied, including without limitation, any implied representations, guarantees, conditions or warranties of merchantability and fitness for a particular purpose, non-infringement, satisfactory quality, non-interference, accuracy of informational content, or arising from a course of dealing, law, usage, or trade practice, use, or related to the performance or nonperformance of any products, accessories, facilities or services or information except as expressly stated in this guide and/or the Product and/or satellite service documentation. Any other standards of performance, guarantees, conditions and warranties are hereby expressly excluded and disclaimed to the fullest extent permitted by the law. This disclaimer and exclusion shall apply even if the express limited warranty contained in this guide or such documentation fails of its essential purpose.

In no event shall NAL Research be liable, whether in contract or tort or any other legal theory, including without limitation strict liability, gross negligence or negligence, for any damages in excess of the purchase price of the Product, including any direct, indirect, incidental, special or consequential damages of any kind, or loss of revenue or profits, loss of business, loss of privacy, loss of use, loss of time or inconvenience, loss of information or data, software or applications or other financial loss caused by the Product (including hardware, software and/or firmware) and/or the Iridium satellite services, or arising out of or in connection with the ability or inability to use the Product (including hardware, software and/or firmware) and/or the Iridium satellite services to the fullest extent these damages may be disclaimed by law and whether advised of the possibilities of such damages. NAL Research is not liable for any claim made by a third party or made by you for a third party.

TABLE OF CONTENTS

TABLE OF CONTENTS	3
GLOSSARY	4
1.0 PURPOSE	5
2.0 SPECIFICATIONS	5
2.1 Mechanical Specifications	5
2.2 RF Specifications	5
2.3 Radio Characteristics	6
2.4 Electrical Specifications	6
2.5 Environmental Specifications	6
2.6 Data I/O Specifications	6
2.7 Reference Documents	7
3.0 MECHANICAL INTERFACES	7
4.0 MULTI-INTERFACE CONNECTOR	7
4.1 Serial Data Interface (9-Wire Configuration)	9
4.2 Serial Data Interface (3-Wire Configuration)	9
4.3 DC Power Interface	9
4.4 Power On/Off Control	10
4.5 DC Supply Indicator Output	10
4.6 Network Availability Output	10
4.7 S-Meter Performance	11
5.0 IRIDIUM ANTENNA CONNECTOR	11
6.0 GPS PASS-THROUGH	12
7.0 CONFIGURATION SETTINGS	13
8.0 MODES OF OPERATIONS	13
9.0 HARDWARE FAILRUE REPORTING	14
10.0 TECHNICAL SUPPORT	14
APPENDIX A: POWER CONSUMPTION OF THE 9602-I	15
APPENDIX B: MECHANICAL DRAWINGS	16
APPENDIX C: STANDARDS COMPLIANCE	17
APPENDIX D: EXPORT COMPLIANCE INFORMATION	18
APPENDIX E: DESCRIPTION OF THE IRIDIUM NETWORK	19

GLOSSARY

BIS	Bureau of Industry and Security
CE	Conformite Europeene
DAV	Data After Voice
DoD EMSS	DoD Enhanced Mobile Satellite Services
DSN	Defense Switch Network
DTE	Data Terminal Equipment
EAR	Export Administration Regulations
FDMA	Frequency Division Multiple Access
GPS	Global Positioning System
ISU	Iridium Subscriber Unit
LNA	Low Noise Amplifier
MMCX	Micro-Miniature Coaxial
MO-SBD	Mobile-Originated SBD
MT-SBD	Mobile-Terminated SBD
OFAC	Office of Foreign Asset Controls
PCB	Printed Circuit Board
RHCP	Right Hand Circular Polarization
RX	Receiving
RUDICS	Router-Based Unrestricted Digital Internetworking Connectivity Solution
PSTN	Public Switch Telephone Network
SBD	Short Burst Data
SIM	Subscriber Identity Module
SMS	Short Message Service
TDD	Time Domain Duplex
TDMA	Time Division Multiple Access
TX	Transmitting
VSWR	Voltage Standing Wave Ratio

1.0 PURPOSE

This document describes the electrical and mechanical interfaces of the Iridium modem 9602-I. The 9602-I is a single board transceiver allowing short-burst data (SBD) connectivity to the Iridium satellite network. It does not support voice, circuit switched data, or short message service (SMS). It is intended to be used as a daughterboard fitted on another host system motherboard via *surface mount* multi-pin connector and antenna connectors. The 9602-I can be controlled by a data terminal equipment (DTE) capable of sending standard AT commands via serial interface at 3.3V digital signal levels. Level shifters are required when connected to a standard RS232 serial port. NAL Research can enable the 9602-I to utilize either the Iridium commercial gateway at Tempe, Arizona or the US DoD EMSS Gateway when requested by an authorized user. Key features of the 9602-I include:

- Supports SBD only
- Does not incorporate nor need a SIM card to operate
- Has an automatic notification indicating a message is queued at the gateway
- Offers a maximum mobile originated (MO) message size of 340 bytes
- Offers a maximum mobile terminated (MT) message size of 270 bytes

IMPORTANT: EMSS-enabled 9602-I must first be provisioned (signed up for airtime) with EMSS SBD Service before testing or field use. Accessing the US DoD EMSS Gateway is not authorized until the 9602-I is provisioned. Unauthorized attempts to access the DoD EMSS Gateway will result in immediate disabling of the offending device, which must then be returned to NAL Research for repair. See <https://sbd.pac.disa.mil> for more information regarding EMSS service provisioning.

IMPORTANT: User should not disassemble the 9602-I for repair or services. The warranty is voided if the 9602-I is disassembled. It should be returned to NAL Research for any services.

2.0 SPECIFICATIONS

2.1 Mechanical Specifications

Dimensions:	1.61" x 1.77" x 0.51" (41 mm x 45 mm x 13 mm)
Weight (approximately):	1.06 oz (30 g)
Multi-Interface Connector:	Samtec FTSH-110-01-L-DV
Iridium Antenna:	MMCX
GPS RF Pass-Through:	MMCX
Enclosure:	Aluminum Alloy/EMI shielding

NOTE: The mechanical drawing of the 9602-I can be found in Appendix B including part numbers for the interface connectors for both data and RF.

2.2 RF Specifications

Operating Frequency:	1616 to 1626.5 MHz
Duplexing Method:	TDD
Input/Output Impedance:	50 Ω

Multiplexing Method: TDMA/FDMA

2.3 Radio Characteristics

Average Power during a Transmit Slot (Max): 1.6W
Receiver Sensitivity at 50 Ω (Typical): -117 dBm
Maximum Cable Loss Permitted: 2dB
Link Margin – Downlink: 13dB
Link Margin – Uplink: 7dB

NOTE: Cable loss should be kept at a minimum. The total implementation loss for an antenna, connectors, cable, lightning arrestor and any other RF component between the 9602-I and the antenna should not exceed 3dB. The total cable loss between the antenna and the 9602-I includes losses in the motherboard. Implementation loss higher than this will affect the Iridium link performance and quality of service. Solutions with a loss higher than 3dB will not meet the requirements of Iridium solution certification.

2.4 Electrical Specifications

Input Voltage Range: +5.0VDC \pm 0.5V
Main Input Voltage Ripple: < 40mV peak-to-peak
Idle Current (Average): 45mA
Idle Current (Peak): 195mA
Transmit Current (Average): 190mA
Transmit Current (Peak): 1.5A
Receive Current (Average): 45mA
Receive Current (Peak): 195mA
SBD Message Transfer Current (Average): 190mA
SBD Message Transfer Power (Average): \leq 1.0W

NOTE: The power requirements apply to DC power measured at the 9602-I multi-interface connector input. The average power consumption may vary depending on the field-of-view between the 9602-I antenna and the Iridium satellite.

2.5 Environmental Specifications

Operating Temperature Range: -40°F to +185°F (-40°C to +85°C)
Operating Humidity Range: < 75% RH
Storage Temperature Range: -40°F to +185°F (-40°C to +85°C)
Storage Humidity Range: < 93% RH

NOTE: Operating temperature range based on a duty-cycled usage model with the 9602-I sending one SBD message per hour and is otherwise turned off during the hour.

2.6 Data I/O Specifications

Short-Burst Data: 340 bytes for Mobile-Originated
Short-Burst Data: 270 bytes for Mobil-Terminated
Hardware Interface: Serial at 3.3V Digital Signals
Software Interface: Standard AT Commands

2.7 Reference Documents

9602-I Product Information

General Description of Model 9602-I (TN2010-110-V1.0)

AT Commands for Models 9602 (TN2010-111-V1.0)

SatTerm Software Manual (TN2009-19-V7.0)

Additional Information on DirectIP SBD (TN2007-637-V1.0)

Additional Information on SBD (AN2007-07-V3.3.0)

3.0 MECHANICAL INTERFACES

The 9602-I is intended to be used as a daughterboard fitted within an enclosed host system (see Figure 1). With appropriate external connectors and housing designs, the integrated system can meet full transceiver regulatory tests. The 9602-I is provided with two mounting holes, one at each diagonal corner. The 9602-I should be assembled onto the motherboard of the host system by pushing the module onto matching connectors on the motherboard and then securing the diagonal mounting holes to the motherboard using mechanical fasteners. The surface below the 9602-I should be a conductive ground plane such that the transceiver bonds to the motherboard ground and thus reducing the possibility of radiated emissions. The 9602-I incorporates three different connectors—a multi-interface connector, an RF Iridium antenna connector and a GPS RF pass-through antenna connector. Matching interface connectors are described in Appendix B.

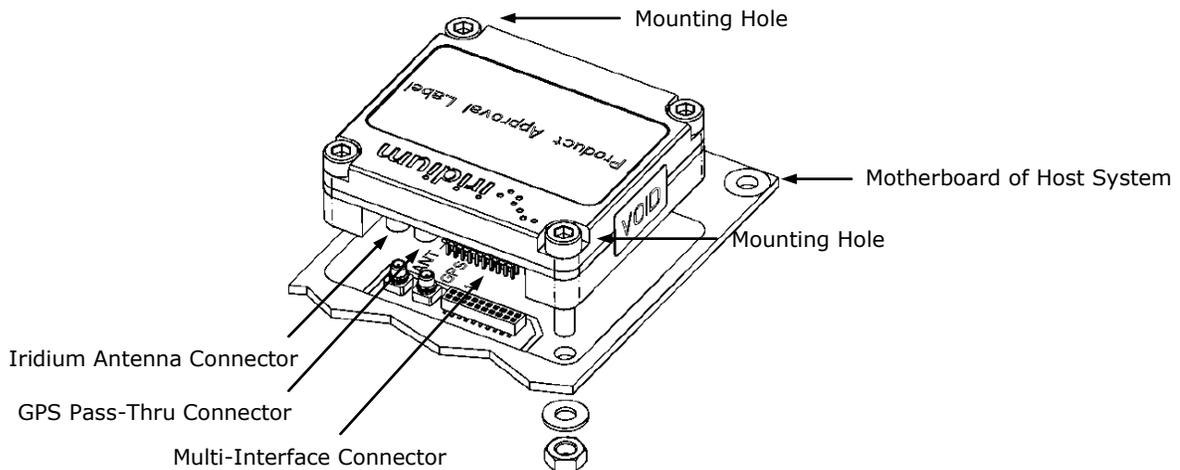


Figure 1. Recommended mounting for the 9602-I transceiver.

4.0 MULTI-INTERFACE CONNECTOR

The multi-interface connector is a Samtec low-profile header part number FTSH-110-01-L-DV. This connector provides the ability for a stackable board-to-board configuration allowing the mating to a host system motherboard. A suitable mating motherboard socket is the Samtec CLP-110-02-L-D (see www.samtec.com for datasheets). The multi-interface connector provides the following connections to the 9602-I modules: DC power input, power on/off control, serial data interface, network availability output and supply power indicator output. Individual pin assignments are summarized in Table 1 and the limits for the

digital signals are listed in Table 2. Multiple power lines are provided and ALL are required to be connected to the power source in order to limit the current on any one pin. Multiple signal grounds are provided to reduce cross-talk.

PIN #	SIGNAL	DESCRIPTION	INTERFACE
1	EXT_PWR	External DC Power Input	+5.0VDC \pm 0.5V
2	EXT_PWR	External DC Power Input	+5.0VDC \pm 0.5V
3	EXT_GND	External GND Input	0V
4	EXT_GND	External GND Input	0V
5	ON/OFF	ON/OFF Control Input; ON \geq 2.0V; OFF \leq 0.5V	Analog
6	S_TX	Serial Transmit Data Input	3.3V Digital
7	S_RX	Serial Receive Data Output	3.3V Digital
8	SIG_GND	Signal Ground, 0V Signal Reference and Return	0V
9	DCD	Serial Data Carrier Detect Output	3.3V Digital
10	DSR	Serial Data Set Ready Output	3.3V Digital
11	CTS	Serial Clear To Send Output	3.3V Digital
12	RI	Serial Ring Indicator Output	3.3V Digital
13	RTS	Serial Request To Send Input	3.3V Digital
14	DTR	Serial Data Terminal Ready Input	3.3V Digital
15	SIG_GND	Signal Ground, 0V Signal Reference and Return	0V
16	Reserved	Reserved	Reserved
17	Reserved	Reserved	Reserved
18	SIG_GND	Signal Ground, 0V Signal Reference and Return	0V
19	NET_AVAIL	Network Availability; Avail=High, Not Avail=Low	3.3V Digital
20	SUPPLY_OUT	Supply Power Indicator Output	+3.3V, 5mA Max.

Table 1. Pin assignments for the multi-interface connector.

PARAMETER	SYMBOL	MIN	MAX	UNIT
Input High Voltage	VIH	2.0	5.5	V
Input Low Voltage	VIL	-0.3	0.8	V
Output High Voltage	VOH	2.4		V
Output Low Voltage	VOL		0.4	V
Low Level Output Current	IOL		4.4	mA
High Level Output Current	IOH		5.5	mA

Table 2. Limits for 3.3V digital signals.

Figure 2 provides a reference for the pin designation of the multi-interface connector. This view is not to scale and not representative of the connector mechanical layout. This view is for illustration purpose only. The view designation is when looking into the multi-interface connector towards the 9602-I module. The numbers indicate pin designation. Additionally, on the 9602-I printed circuit board, pin 1 on the multi-interface connector is indicated on the board silkscreen.

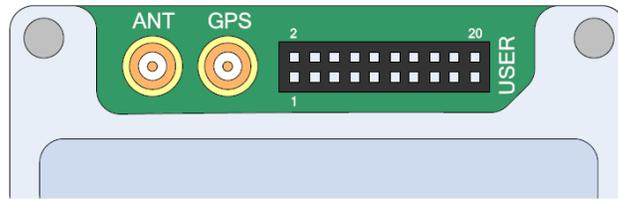


Figure 2. Multi-interface connector pin number designation (from below 9602-I).

4.1 Serial Data Interface (9-Wire Configuration)

The 9602-I supports a standard serial data interface to a host system DTE incorporating hardware handshaking and flow control. The serial data interface comprises of eight 3.3V digital signals and a ground signal as shown in Table 1. Level shifters are required if the serial interface to the DTE is an RS232. The serial interface allows a connected DTE to utilize the 9602-I’s functionality through AT commands. Note that the ring indicator is used by the 9602-I to indicate that a mobile-terminated SBD (MT-SBD) message is queued at the gateway. The DTE can monitor this pin and use appropriate AT commands to retrieve the MT-SBD message. The 9602-I does not support autobaud. The baud rate must be set using the AT+IPR command. The default factory-set baud rate is 19.2 kbits/sec.

4.2 Serial Data Interface (3-Wire Configuration)

By default, the 9602-I’s serial interface operates as a 9-wire connection and it is a recommended configuration. However, the 9602-I may also be operated with a 3-wire connection, where only transmit, receive and ground signals are used with no flow control. Several steps must be taken to allow 3-wire configuration. These steps ensure the 9602-I and DTE to work together without having hardware handshaking.

1. AT&Dn must be set to AT&D0 to ignore the DTR input
2. AT&Kn must be set to AT&K0 to disable RTS/CTS flow control
3. The other output signals may be connected and operate as follows:
 - a. CTS driven ON (low)
 - b. DSR operates as normal
 - c. RI operates as normal
 - d. DCD driven ON (low)

Note that RTS/CTS flow control, when enabled, is only used when the data port is in SBD data mode. In AT command mode, RTS is ignored and CTS is driven ON (low). Moreover, if the DC input to the 9602-I is to be disconnected, user will need to “tri-state” the serial interface to prevent a possible latch-up condition.

4.3 DC Power Interface

DC power interface comprises of the DC power inputs and a control signal as summarized in Table 1. The +5V inputs and 0V supply returns are used to supply DC power to the 9602-I and to ensure that enough current can be drawn across the connector without the 9602-I malfunctioning during an SBD transmit due to lack of current supply. Note that all power and ground pins should be connected externally.

DC power supply requirements for the 9602-I are summarized in Appendix A. In addition, the power supply must also guarantee the followings:

- The supply voltage drop over for a 8.3msec burst of 1.5A current should not be more than 0.2V.

- The power supply should limit the in-rush current to 4A maximum. If current exceeds this value damage can occur to the 9602-I.
- The power supply should provide for over current protection in case of device malfunction.
- The supply noise should be less than the limits in the following profile:

100mV peak-to-peak	from 0 to 50kHz
5mV peak-to-peak	at 1MHz measured in 50kHz bandwidth
10mV peak-to-peak	at 1MHz measured in 1MHz bandwidth
5mV peak-to-peak	above 5MHz measured in 1MHz bandwidth

4.4 Power On/Off Control

An external on/off input is provided on pin#5 of the multi-interface connector. The 9602-I starts up when power is applied and pin#5 input is high. As long as the input voltage is applied, logic high on this pin turns the 9602-I on and a logic low turns it off. If controlling pin#5 is not required then it must be connected directly to the +5 V supply. Note that this on/off control is similar to the 9601 products.

Prior to turning off the 9602-I a "flush memory" (AT*F) command should be issued to ensure all memory write activity is completed. When a 9602-I has been turned off, users should not reapply power on a unit until more than 2 seconds has elapsed after power has reached 0V. Additionally, if a unit does not respond to AT commands, power off the module, wait for 2 seconds and then power it back on. When a 9602-I is powered off the power on reset circuit requires 2 seconds for voltages to decay. If the 2 second wait time is not adhered to the reset circuit may not operate and the 9602-I could be placed in a non-operational state. The state is not permanent and can be rectified by the above procedure.

4.5 DC Supply Indicator Output

A DC supply indicator signal is provided by the 9602-I on pin#20, which could be used directly for driving an LED to provide a visible indication that the 9602-I supply is on. Alternatively the output signal could be used in application logic to determine if the internal 9602-I power supply is on.

4.6 Network Availability Output

The digital output of pin#19 can be used to determine when the 9602-I has visibility to the Iridium satellite network or the Iridium network is "available". Network Available means only that the 9602-I can successfully receive the Ring Channel, or, put more simply, it can see an Iridium satellite. Network Available is not a guarantee that a message can be successfully sent. The Network Available state is evaluated every time the Ring Channel is received or missed. If the Ring Channel is visible, then it is updated every 4 seconds. If the Ring Channel is not currently visible, then the update period can be as long as 2 minutes, depending on how long the lack of satellite visibility existed. This is because the 9602-I attempts to conserve power by increasing the ring search interval while the satellites are not visible. Every time a ring search fails, the time to wait is increased and eventually limits at 120 seconds. The wait time between search windows is reset to 4 seconds every time a search succeeds.

If Network Available is currently off, user may still attempt an SBDI[X] session. This will force the 9602-I to look for the Ring Channel immediately, and on finding it, to attempt to send the message. In this case Network Available will not come on immediately. The Network Available does not turn on while in a +SBDI session. It will, however, turn on 4 seconds later assuming that the Ring Channel is present. After the SBD session completes, the 9602-I performs a new Ring Channel search sequence, at the end of which Network

Available gets turned on. That can take between 4 and 12 seconds. If the +SBDI attempt fails to find the ring channel, the search window does not reset to 4 seconds. Note that the behavior of +CIEV:1 is identical in to that of the Network Available output.

4.7 S-Meter Performance

The S-meter readings reported over the AT command interface indicate the signal strength of a 9602-I. Care should be taken when using the S-meter readings for comparisons between devices. Of particular note are the followings:

1. There is a 0.5 dB tolerance on calibrating the S-meter.
2. Each signal strength bar represents a 2 dB increment.
3. Multiple ring channels can be present at the same time so units can lock to different signals.
4. The Test Interface Card (TIC board) implementation adds about 0.6 dB loss in the antenna path.
5. If the reading is near the decision threshold it would be easy to see a 1 bar difference

5.0 IRIDIUM ANTENNA CONNECTOR

The 9602-I uses a single RF MMCX connector for both transmit and receive and labeled as "ANT" on the board silkscreen. The mating connector is from Samtec part number MMCX-P-P-H-ST-TH1. This is a through hole PCB mount connector with the correct mechanical spacing to allow the 9602-I to fit flush on the motherboard. The RF connector on the 9602-I is intended for an inter-board connection to the host system motherboard and should not be directly connected to an external antenna cable or cable distribution system. The EN609502 compliance standard outlines that telecommunications equipment needs protection from a 2KV spike. The MMCX connectors are not capable of 2KV operations therefore protection needs to be provided on the motherboard and a larger connector needs to be used. Developers are encouraged to review the EN609502 compliance standards for additional details.

The 9602-I should be connected to an Iridium-band antenna with the following characteristics.

PARAMETER	VALUE
Input/Output Impedance	50 Ω nominal
Gain	3 dBi
Polarization	RHCP
VSWR (Maximum Operational)	1.5 to 1

If the specific application requires a custom antenna, it must meet the following characteristics.

PARAMETER	VALUE
Operating Temperature Range	-40°C/+85°C without loss of function
Measurement Frequency Range	1616 to 1626.5 MHz
Return Loss (Minimum)	9.5 dB (<1.5:1 VSWR)
Gain	0.0 dBic (weighted average minimum)
Minimum 'Horizon' Gain	-2.0 dBic (82° conic average)
Nominal Impedance	50 Ω
Polarization	Right Hand Circular (RHCP)
Basic Pattern	Omni directional and hemispherical

6.0 GPS PASS-THROUGH

The second RF MMCX connector, labeled "GPS" on the board silkscreen, is a pass-through connection from the Iridium antenna path and is provided for GPS receivers that wish to share the Iridium antenna. An overview of this circuit is provided in Figure 3. Users must select a wideband Iridium antenna with appropriate sensitivity in both the Iridium frequency and the GPS frequency. The 9602-I will allow for GPS signals to pass at all times except during Iridium transmitter burst. This will protect the GPS receiver from electrically overstress condition with a minimum impact on the GPS reception and functionality. However, the Iridium signal CANNOT be totally isolated. During the SBD transmit burst, there will be leakage of the 1616 to 1626 MHz to the GPS port which can significantly degrade the quality of the GPS signals. Appropriate SAW filters must be implemented in the front end of the GPS receiver.

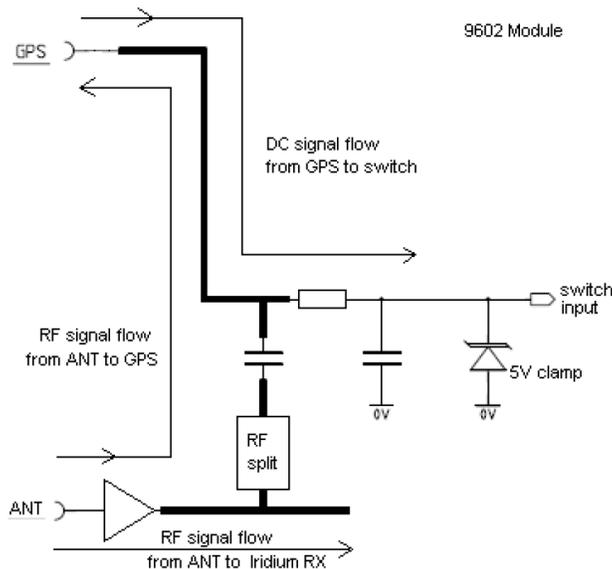


Figure 3. GPS path when 9602-I is not transmitting and GPS is active.

The GPS pass through can be turned on by applying a 1.2VDC threshold to the "GPS" MMCX connector. The DC bias on the GPS antenna connector is similar to having an active GPS antenna. In normal operation this bias would be used to power the LNA inside the active antenna. For the Iridium 9602-I, the bias voltage is used to activate an RF switch and enable connection of the GPS port to the antenna port. The GPS connection can be left un-terminated when not used. With external power applied but the 9602-I off, the GPS path is still available for use. A DC voltage on the GPS connector will activate the LNA in the 9602-I, and the 9602-I draws ~10mA from the 9602-I supply. With external power applied and the 9602-I inactive, and the GPS path not enabled, the quiescent current consumption will be less than 0.5mA.

The following operational points should be noted when using the GPS receivers connected to the pass-through GPS MMCX connector:

- The GPS pass-through path is activated by detecting the presence of a DC voltage on the center-pin of the GPS connector. The 9602-I uses the voltage from the GPS center pin to switch on the RX path and requires minimal current of less than 100 μ A. The GPS path is activated when this center-pin voltage is higher than 1.2V.

- There is a path loss of approximately 3dB in the receive direction from ANT to GPS.
- The GPS receive path is temporarily switched off during transmissions from the 9602-I.
- As long as the 5VDC supply to the 9602-I is connected and the DC voltage on the GPS connector is present, the GPS pass-through path is made available. The GPS path is available even when the 9602-I has been turned off using its On/Off control signal.
- If the GPS port is not used it may be left un-terminated with no adverse affect.
- The GPS receiver must present 50Ω impedance across the Iridium band or SBD performance could be degraded.
- The output return loss is typically –8 dB.

7.0 CONFIGURATION SETTINGS

The 9602-I allows the DTE to configure the data port communication parameters. The three configuration types are active, factory default, and stored. The active configuration is the set of parameters currently in use. They can be changed by the DTE individually via specific AT commands. The factory default configuration is stored in permanent memory. This configuration can be recalled at any time through use of the AT&Fn command.

Two groups of settings, or “profiles”, can be stored as user-defined configurations. The DTE first creates desired active configurations and then writes them to memory using the AT&Wn command. These profiles can be designated to be loaded as the active configuration upon 9602-I power-up through use of the AT&Yn command. The 9602-I can be reset without loss of power to these profiles through use of the ATZn command.

8.0 MODES OF OPERATIONS

The serial interface to a host system DTE is always in one of three modes: command mode, SBD data mode or SBD session mode. When the data port is in command mode, AT commands can be entered to control the 9602-I. In command mode, flow control has no effect, with the RTS input ignored and the CTS output driven ON (low). When in SBD data mode, the 9602-I is transferring binary or text SBD message data to or from the DTE.

In SBD data mode:

- All characters from the DTE not forming part of the message data are ignored (i.e. no AT commands may be entered).
- No unsolicited result codes are issued.
- RTS/CTS flow control, if enabled, is active. When RTS is OFF (high), the 9602-I suspends transfer of data to the DTE; when CTS is OFF (high), the 9602-I expects the DTE to suspend transfer of data to the 9602-I.

When in SBD session mode, the 9602-I is attempting to conduct an SBD session with the Iridium network. In SBD session mode:

- The DTE must wait for the +SBDI [X][A] session result code.
- All characters from the DTE are ignored.
- Unsolicited result codes are issued where those codes have been enabled.

Transitions between the modes of operation are performed automatically by the 9602-I in response to the SBD AT commands; the DTE has no other control over the mode.

9.0 HARDWARE FAILURE REPORTING

If the 9602-I detects a hardware problem during initialization, it may not be able to function. Under such case, the 9602-I will notify the DTE by issuing an unsolicited result code at the end of initialization:

HARDWARE FAILURE: <subsys>,<error>

where <subsys> identifies the software subsystem that detected the error, and <error> is the subsystem-specific error code. Any AT commands that cannot be handled in the failure condition will terminate with result code 4 ("ERROR").

10.0 TECHNICAL SUPPORT

FOR TECHNICAL SUPPORT, PLEASE CONTACT US AT

Phone: 703-392-1136

FAX: 703-392-6795

E-mail: contact@nalresearch.com


Technical documents are also available to download on NAL Research's website www.nalresearch.com under <http://www.nalresearch.com/AnonymousFTPSite.html>

APPENDIX A: POWER CONSUMPTION OF THE 9602-I




This section gives users some insight to the electrical power profile of the 9602-I. It does not describe every situation and permutation possible. It should be used as a starting point for the users to continue their own development design. The actual usage profile can vary for a number of reasons:

1. View of the sky – if in poor visibility of the sky where a clear line of sight is not available between the transceiver and the satellite.
2. The higher the antenna VSWR the higher the current consumed.
3. How often the 9602-I module is activated/deactivated by the host system motherboard.
4. Manufacturing variation from transceiver to transceiver.

The host system designer should ensure their design covers for worst case power consumption scenarios. Figure below provides a graphical representation of the typical supply current profile of a 9602-I sending and receiving SBD messages.

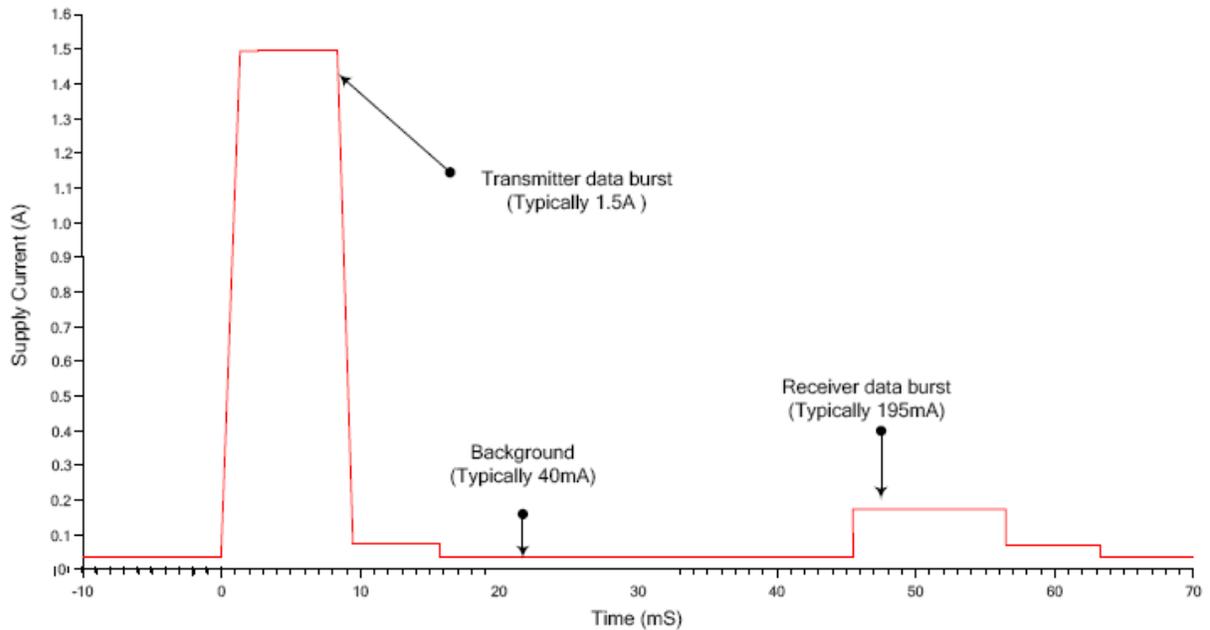

DWG. REV										REVISIONS				
A										ZONE	REV	DESCRIPTION:	DATE:	APPROVED:
BD												INITIAL RELEASE		
A/W														

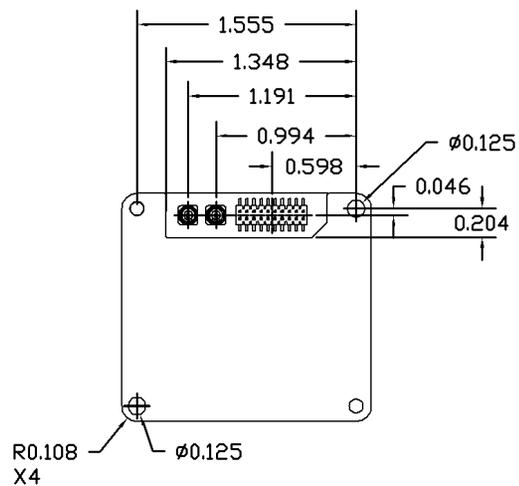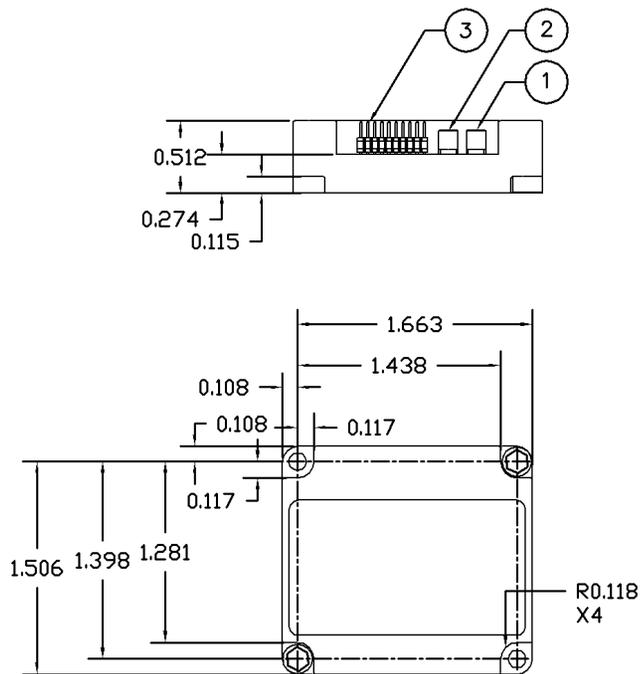

NOTES:

1. IRIIDIUM ANTENNA CONNECTOR
 PN: SAMTEC MMCX-J-P-H-ST-TH1
 MATING PN: SAMTEC MMCX-P-P-H-ST-TH1
2. GPS PASSTHROUGH CONNECTOR
 PN: SAMTEC MMCX-J-P-H-ST-TH1
 MATING PN: SAMTEC MMCX-P-P-H-ST-TH1
3. 9602-I MULTI-INTERFACE CONNECTOR:
 PN: SAMTEC FTSH-110-01-L-DV
 MATING PN: SAMTEC CLP-110-02-L-D

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES \pm .XX ± .01" ± .XXX ± .005" ±</small>	CONTRACT NO.		DRAWING NAME	
	APPROVALS	DATE	9602-I	
MATERIAL	DESIGNER E. RODERICK	05/19/10	DRAWING NO. 92354	
FINISH	CHECKER		SCALE 1:1	REV 1
	PROJ. ENG.		SHEET 1 of 1	
	APPROVED D. GAIBROIS	05/19/10		

APPENDIX C: STANDARDS COMPLIANCE

The 9602-I is designed to meet the regulatory requirements for approval for FCC, Canada, and CE assuming an antenna with a gain of ~3 dBi and adequate shielding. The 9602-I is tested to the regulatory and technical certifications shown in table below.

Regulatory Approvals	Radio Tests	EMC Tests	Mechanical/ Electrical Tests
CE	ETSI EN 301 441 V1.1.1 (2000-05)	ETSI EN 301 489-1 V1.8.1 (2008-04) ETSI EN 301 489-20 V1.2.1 (2002-11)	EN60950-1:2006 Part 1
FCC	FCC CFR47 Parts 2, 15, and 25	EN61000-4-2: 1995/A2: 2001 Part 4.2 EN61000-4-3: 2002 Part 4.3 EN61000-4-4: 2004 EN61000-4-6: 1996/A1: 2001 Part 4.6 EN55022: 2006	
Industry Canada	Industry Canada RSS170 Issue 1, Rev 1, November 6, 1999		

APPENDIX D: EXPORT COMPLIANCE INFORMATION


The 9602-I is controlled by the export laws and regulations of the United States of America (U.S.). It is the policy of NAL Research to fully comply with all U.S. export and economic sanction laws and regulations. The export of NAL Research products, services, hardware, software and technology must be made only in accordance with the laws, regulations and licensing requirements of the U.S. Government. NAL Research customers must also comply with these laws and regulations. Failure to comply can result in the imposition of fines and penalties, the loss of export privileges, and termination of your contractual agreements with NAL Research.

The export and re-export of NAL Research products and services are subject to regulation by the Export Administration Regulations (15 CFR 730-744), as administered by the U.S. Department of Commerce, Bureau of Industry and Security ("BIS"). See: <http://www.bxa.doc.gov> for further information on BIS and the Export Administration Regulations (EAR). Additional export restrictions are administered by the U.S. Department of the Treasury's Office of Foreign Asset Controls ("OFAC"). See: <http://www.ustreas.gov/ofac> for further information on OFAC and its requirements.

APPENDIX E: DESCRIPTION OF THE IRIDIUM NETWORK

E.1 Description of the Iridium Network

The Iridium satellite network is owned and operated by Iridium Satellite LLC (ISLLC). It was constructed as a constellation of 66 satellites in low-earth orbit, terrestrial gateways and Iridium subscriber units (ISU). An ISU can either be an Iridium satellite phone or any of the modems. The satellites are placed in an approximate polar orbit at an altitude of 780 km. There are 6 polar planes populated with 11 satellites per orbit constituting the 66 satellite constellation. The near polar orbits of the Iridium constellation provide truly real-time and global coverage from pole-to-pole.

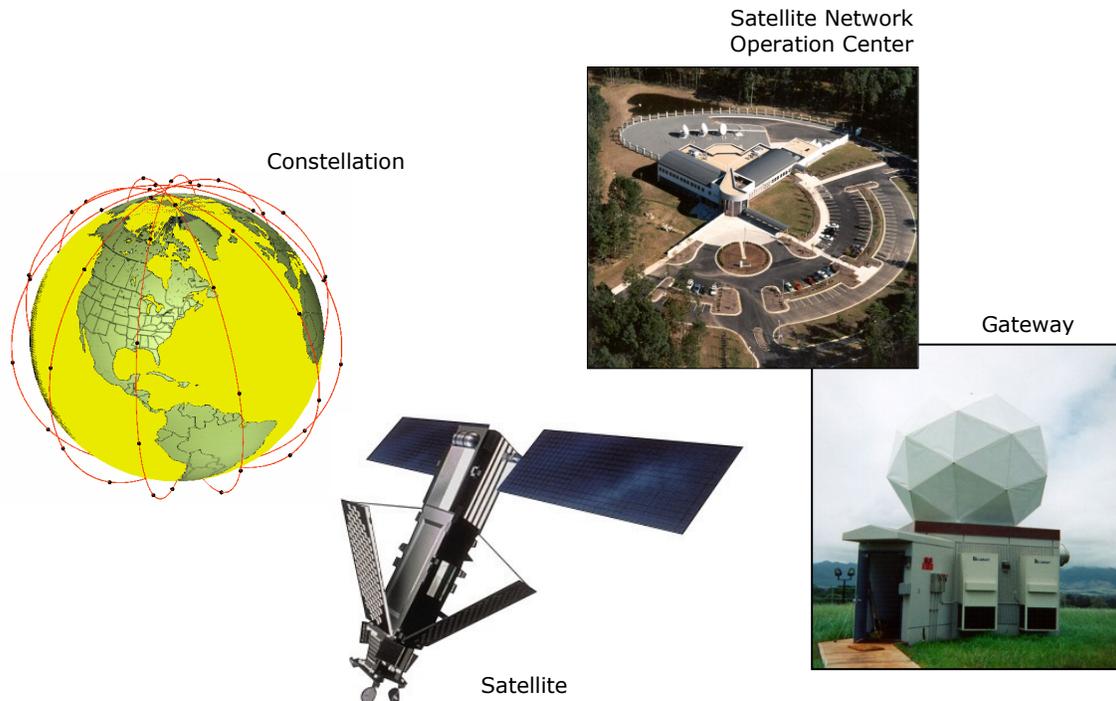

The Iridium is designed to operate in the band of 1616 to 1626.5 MHz although the exact frequencies used depend on the local regulating authorities and issued licenses in any particular region. Each satellite projects 48 beams on the surface of earth, which may be viewed as providing coverage cells on the ground similar to terrestrial systems. Each beam is approximately 600 km in diameter. The 66-satellite constellation has the potential to support a total of 3,168 spot beams; however, as the satellite orbits converge at the poles, overlapping beams are shut down. The satellite footprint is $\sim 4,700$ km in diameter. Under each footprint, a satellite is power limited to $\sim 1,100$ simultaneous circuits.

The Iridium network uses a time domain duplex (TDD) method and transmits and receives in an allotted time window within the frame structure. Since the system is TDD, the ISU transmit and receive in the same frequency band. The access technology is a FDMA/TDMA (frequency division multiple access/time division multiple access) method whereby an ISU is assigned a channel composed of a frequency and time slot in any particular beam. Channel assignments may be changed across cell/beam boundaries and is controlled by the satellite. The system will provide an average link margin of 13.1 dB.

Although there are multiple gateways, a user is registered to a single gateway. The gateways perform call connection setup and administrative duties such as billing and resource management. The satellite constellation provides connectivity between users, from a user to the Iridium system gateway, and between gateways. Within the Iridium network architecture, the satellites are cross-linked which allows ISU to ISU communication independent of gateway intervention once the call connection is established.

There are currently two commercial Iridium gateways located in Arizona, United States and Fucino, Italy. The U.S. government owns and operates an Iridium gateway located in Hawaii, United States. Each gateway generates and controls all user information pertaining to its registered users, such as user identity, geo-location and billing items. The gateway also provides connectivity from the Iridium system to the terrestrial based networks such as the PSTN.

E.2 Description of the Iridium Network Data Capabilities

For data communications, the Iridium network supports five different modes of operation as shown in Figure E1—dial-up data service, direct Internet connection, short-burst data (SBD), short-messaging service (SMS) and router-based unrestricted digital internetworking connectivity solution (RUDICS).

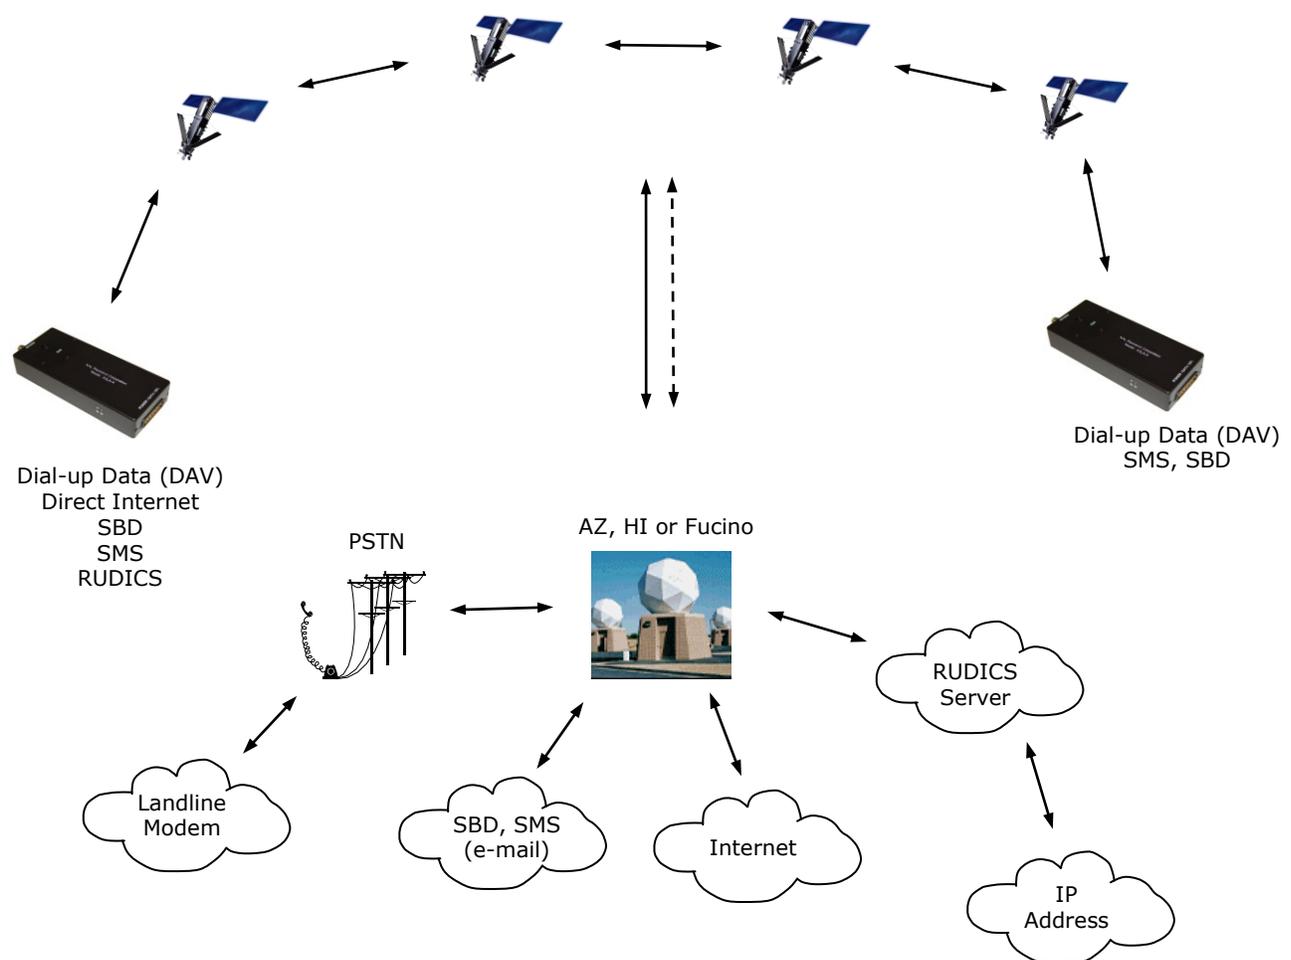


Figure E1. Iridium network data capabilities.

E.3 Dial-Up Data Service

Dial-up data service provides connectivity through the Iridium satellite network to another Iridium modem, to the public switch telephone network (PSTN), to the Defense Switch Network (DSN), to a remote LAN (e.g., a corporate network) or to an Internet Service Provider (ISP) at a nominal data rate of 2.4 kilobits per second (Kbps). The connection time involving user authentication and handshaking (or modem training) can range from 15 to 30 seconds. For an Iridium-to-Iridium call, dial-up data service offers an additional option known as data after voice or DAV. Similar to a voice call, a DAV call is routed directly from one Iridium modem to another Iridium modem without going through the gateway.

Many desktop and laptop computers are equipped with either an internal or external modem to perform dial-up data applications across the landline telephone network (PSTN). On these computers, terminal emulator software or a dial-up networking connection can be configured to a specific modem with a phone number to dial, user identification and password. The modem can then be used to call another computer, a remote LAN or an Internet service provider as shown in Figure E2. The handshaking and protocols are established between the modems independent of the landline.

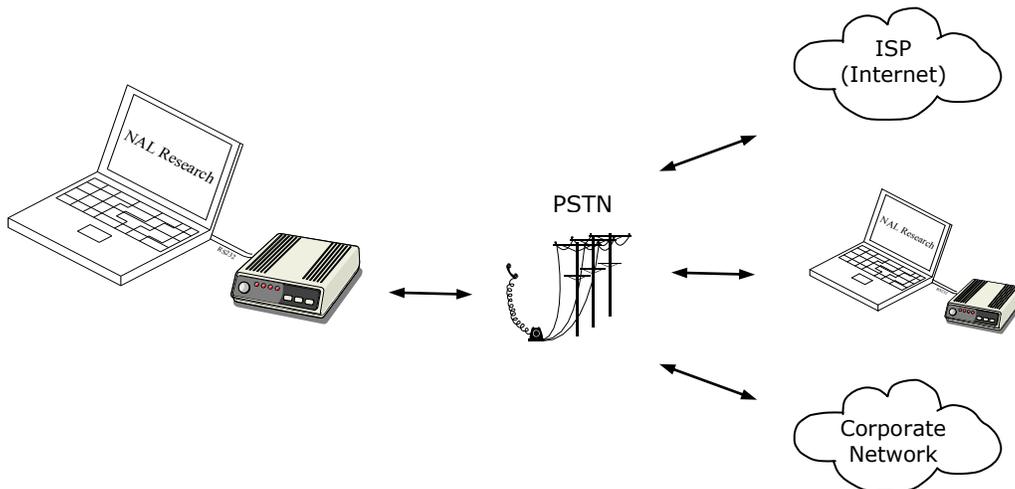


Figure E2. PSTN dial-up connectivity.

The Iridium dial-up data service functions in much the same way as the PSTN dial-up connectivity. From the perspective of a computer, the Iridium modem is just another external modem. The only difference is that the dialed telephone number must conform to the international dialing pattern used by Iridium. When a data call is placed, the Iridium modem actually dials and initiates a connection with the Iridium gateway through the Iridium satellite constellation. Since the Iridium modem is requesting to establish a data connection, the switch at the gateway routes the call through another modem. The modem at the Iridium gateway then dials into and connects to another modem at the other end. Figure E3 illustrates how an Iridium dial-up data service call is routed. The handshaking and protocols established between the modems independent of the Iridium network.

For those ISU-to-ISU dial-up calls where data transmission delay is critical such as the application of TCP/IP protocol, DAV should be considered in the design. This option eliminates the Iridium gateway once

authentication and registration is completed allowing ISU-to-ISU communication without the gateway in the loop.

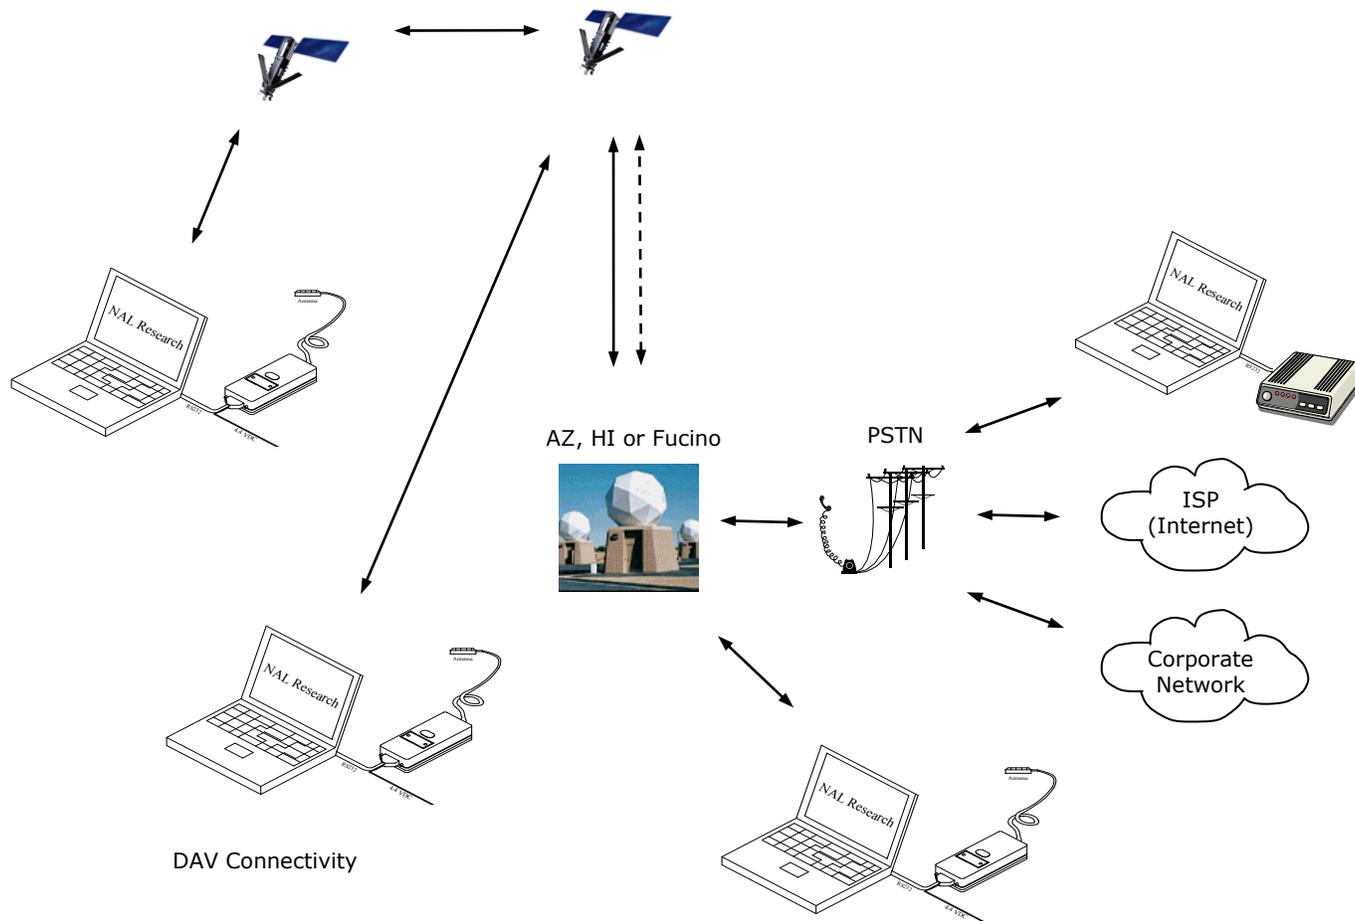


Figure E3. Iridium dial-up data service.

E.4 Direct Internet Connection

The Iridium Direct Internet service allows users to connect to the Internet via the Iridium gateway without having to sign up with an Internet service provider. This service utilizes a dedicated Apollo Server at the Iridium gateway, which provides high-speed connectivity to the Internet and optimizes server-to-Iridium modem communications. The dial-up networking setup is similar to the dial-up networking setup for landline telephone. The only difference is that the dialed telephone number is an international number provided by Iridium. Figure B3 illustrates how Iridium Internet (NIPRNet) call is routed.

Direct Internet service can be enhanced using Windows-based emulated point-to-point protocol (PPP) called the Apollo Emulator. With the use of the Apollo Emulator software instead of Microsoft Windows® dial-up networking, Direct Internet service can reduce connection time and improve data throughput. In addition, the Apollo Emulator offers a feature called Smart Connect™, which manages airtime by seamlessly connecting and disconnecting a user through the Iridium system. Airtime charges accumulate only while the call is connected. Improved effective data throughput is achieved through the use of user-transparent data

compression. The channel rate is still 2.4 Kbps. However, 10 Kbps effective throughput can be achieved depending on content (graphics and images will result in lower effective throughput).

E.5 Short-Burst Data (SBD)

SBD is a simple and efficient bi-directional transport capability used to transfer messages with sizes ranging from zero (a mailbox check) to 1960 bytes. SBD takes advantage of signals within the existing air interface, without using the dedicated traffic channels. As a result, small amounts of data can be transferred more efficiently than those associated with circuit-switched data calls. Messages that originate from an Iridium modem can be delivered to a variety of destinations. Commonly, data are delivered across terrestrial communications networks (NIPRnet and Internet) to servers and applications that process data from one or multiple fielded Iridium modems. SBD service also supports the transfer of messages to Iridium modems, where messages may originate from terrestrial sources. Delivery methods and options are initially configured when the Iridium modem is first purchased and may be easily modified via web pages at a later time.

E.6 Short Messaging Service (SMS)

SMS is a mechanism to deliver short data messages over the Iridium satellite network to the NIPRNet/Internet. Iridium SMS service incorporates a subset of the GSM SMS features. Each SMS message can be up to 160 text characters (7-bit coded) in length. The text characters are based on a 7-bit alphabet, which is encoded and transmitted as 8-bit data, hence the 140 octet (byte) maximum message size.

SMS service is a store and forward method of transmitting messages to and from an Iridium modem. The short message from the modem is stored in a central Short Message Center (SMSC) which then forwards it to the destination. In the case that the recipient is not available, the SMSC will attempt to deliver the SMS until it is delivered or the validity period expires. SMS supports a limited confirmation of message delivery. The sender of the short message can request to receive a return message notifying them whether the short message has been delivered or not. With this option, the originator gets a confirmation that the message was delivered to the SMSC. Unlike standard GSM, the Iridium SMS can only acknowledge that the message was delivered to the SMSC and not the end-destination.

SMS messages can be sent and received simultaneously while a voice call is in progress. This is possible because SMS messages travel over and above the radio channel using the signaling path, whereas the voice call uses a dedicated "traffic" radio channel for the duration of the call.

E.7 RUDICS

RUDICS is an enhanced gateway termination and origination capability for circuit switched data calls across the Iridium satellite network. When an Iridium modem places a call to the RUDICS Server located at the Iridium Gateway, the RUDICS Server connects the call to a pre-defined IP address allowing an end-to-end IP connection between the Host Application and the Iridium modem. There are three key benefits of using RUDICS over the conventional PSTN circuit switched data connectivity or mobile-to-mobile data solutions: (1) elimination of analog modem training time, (2) increased call connection quality, reliability, and maximized throughput and (3) protocol independence.

E.8 Iridium Geo-Location

The Iridium network makes calculations of the geographical location (geo-location) of an ISU each time a call is placed. The technique employed to determine the geo-location of an ISU is based on measurements of the ISU and satellite propagation delay and Doppler frequency shift. These measurements are used to estimate cosines of spherical angles that identify the ISU's location relative to the satellite by the gateway.

The Iridium network can locate an ISU to within 10 km only about 78% of the time. The so-called error ellipse can have a large eccentricity with the major axis oriented in the azimuth dimension and the minor axis oriented in the radial dimension. The position of the ISU in the radial dimension relative to the satellite can almost always be determined to within 10 km with just one measurement. Errors in the azimuth dimension relative to the satellite are largest along the satellite's ground path and tend to increase with distance from the satellite. Geo-location errors in the east-west dimension, therefore, are sometimes more than 100 times greater than in the north-south dimension.