

SHOUT nano 100 User Guide

Version E

September 15, 2025



Legal Disclaimer and Condition of Use

This document contains information for the SHOUT nano 100-01 and SHOUT nano 100-40 trackers and accompanying accessories (“Product”), which is provided “as is.” Reasonable effort has been made to make the information in this document reliable and consistent with specifications, test measurements and other information. However, NAL Research Corporation and its affiliated companies, directors, officers, employees, agents, trustees or consultants (“NAL Research”) assume no responsibility for any typographical, technical, content or other inaccuracies in this document. NAL Research reserves the right in its sole discretion and without notice to you to change Product specifications and materials and/or revise this document or withdraw it at any time. User assumes the full risk of using the Product specifications and any other information provided. SHOUT nano 100 is not suitable for use in locations where children are likely to be present. Do not open or modify the SHOUT nano 100 in any manner. All internal maintenance shall only be done by an NAL Research Corporation authorized service professional.

NAL Research makes no representations, guarantees, conditions or warranties, either express or implied, including without limitation, any implied representations, guarantees, conditions or warranties of merchantability and fitness for a particular purpose, non-infringement, satisfactory quality, non-interference, accuracy of informational content, or arising from a course of dealing, law, usage, or trade practice, use, or related to the performance or nonperformance of any products, accessories, facilities or services or information except as expressly stated in this guide and/or the Product and/or satellite service documentation. Any other standards of performance, guarantees, conditions and warranties are hereby expressly excluded and disclaimed to the fullest extent permitted by the law. This disclaimer and exclusion shall apply even if the express limited warranty contained in this guide or such documentation fails of its essential purpose.

In no event shall NAL Research be liable, whether in contract or tort or any other legal theory, including without limitation strict liability, gross negligence or negligence, for any damages in excess of the purchase price of the Product, including any direct, indirect, incidental, special or consequential damages of any kind, or loss of revenue or profits, loss of business, loss of privacy, loss of use, loss of time or inconvenience, loss of information or data, software or applications or other financial loss caused by the Product (including hardware, software and/or firmware) and/or the Iridium satellite, or arising out of or in connection with the ability or inability to use the Product (including hardware, software and/or firmware) and/or the Iridium satellite to the fullest extent

these damages may be disclaimed by law and whether advised of the possibilities of such damages. NAL Research is not liable for any claim made by a third party or made by you for a third party.

Revision History

Revision	Date	Description
0.0	10/16/2024	Initial Release
A	01/08/2025	Formal Release
A.1	02/05/2025	Updated SHOUT nano 100 weight in Appendix D.1
B	02/05/2025	Formal Release
B.1	05/13/2025	Added Appendix F
C	05/13/2025	Formal Release
D.1	08/15/2025	Added ESBD content
E	09/15/2025	Formal Release

Reference Documents

The latest revisions of the NAL documents are available by request via email.

Support@nalresearch.com.

Reference	Title	Revision/Date
[1]	<i>AT Commands for Model SHOUT nano 100</i>	Revision B, 19 April 2024
[2]	<i>NAL GPS Report Version 6 Format</i>	Revision 3, 26 September 2018
[3]	<i>PECOS Message Definition Specification, 200907-001</i>	Version 1.7 July 29, 2009
[4]	<i>SHOUT App User Guide</i>	Version E, April 25, 2024
[5]	<i>SatTerm for SHOUT nano 100</i>	Version A, May 4, 2023

Table of Contents

1	INTRODUCTION	11
1.1	Device Description	12
1.2	Accessories	13
2	USER INTERFACES.....	14
2.1	Power/Enter Button	14
2.2	Activate Emergency/911	14
2.3	USB-C Connector Port	15
2.3.1	USB Data	15
2.3.2	DC Power Inputs	16
2.4	Bluetooth	16
3	INITIAL SETUP.....	17
3.1	Prepare Device	17
3.2	Start Device	17
3.3	Charge Device	18
3.4	AT Command Mode	18
4	IMPORTANT FEATURES	19
4.1	Communication Links	19
4.2	Enhanced Short Burst Data (ESBD) Capability	19
4.2.1	Security and Key Management	19
4.2.2	Soft Rogue and Hard Rogue	19
4.3	Modes of Operation	20
4.3.1	Command Mode	21
4.3.2	Tracking Mode	21
4.4	Call-Outs and Turn-On Delay	23
4.5	Geofencing	23
4.6	Motion Detection	24
4.7	Encryption	24
4.8	Remote Updates	24
5	SHOUT APP	26
5.1	Pairing SHOUT nano 100 to a Mobile Device	26
6	USING SHOUT NANO 100	27

6.1	Home Screen	27
6.2	Status Symbols	28
6.3	Battery Charging Status.....	28
6.4	Messaging	29
6.4.1	Inbox.....	29
6.4.2	Canned Messages	30
6.4.3	Erase Messages.....	31
6.5	Configuration	32
6.5.1	Enable Tracking.....	32
6.5.2	Track Report Rate	33
6.5.3	Check Mailbox Rate	33
6.5.4	Contrast	34
6.5.5	Backlight	34
6.5.6	Reset Settings	35
6.6	Utilities.....	35
6.6.1	Check GPS.....	36
6.6.2	Reset GPS.....	36
6.7	Cancel 911.....	36
6.8	Enable BT Pairing/ Passkey.....	37
6.9	Unit Info	38
7	TURN OFF DEVICE.....	39
8	TECHNICAL SUPPORT.....	40
	APPENDIX A: STANDARDS COMPLIANCE	41
	APPENDIX B: EXPORT COMPLIANCE	42
	APPENDIX C: THE IRIDIUM NETWORK	43
C.1	Iridium Network Data Capabilities	44
C.1.1	Dial-Up Data Service	45
C.1.2	Direct Internet Connection	46
C.1.3	RUDICS Data.....	47
C.1.4	Short Burst Data.....	47
C.1.5	Short Messaging Service	48
C.2	Iridium Geolocation	48

APPENDIX D: DESIGN SPECIFICATIONS	50
D.1 Mechanical Specifications.....	50
D.2 Iridium RF Specifications.....	50
D.3 GNSS Specifications	50
D.4 Bluetooth RF Specifications	51
D.5 Electrical Specifications	51
D.6 Environmental Specifications.....	51
D.7 Data I/O Specifications	51
D.8 Related Hardware.....	52
APPENDIX E: SHOUT NANO 100 MECHANICAL DRAWING.....	53
APPENDIX F: STORAGE AND MAINTENANCE.....	54

Table of Figures

Figure 1: SHOUT nano 100 External Components	12
Figure 2: SHOUT nano 100 Accessories	13
Figure 3: Emergency 911-Activate	14
Figure 4: Emergency 911-Status Symbol Field	15
Figure 5: USB Connector Port.....	15
Figure 6: Home Screen	17
Figure 7: Battery Charging Icon	18
Figure 8 Options Menu and Configure Window Menu Item	21
Figure 9: Home Screen	27
Figure 10 Power/Enter Button	39
Figure 11 Powering Off Message	39
Figure 12: Iridium Network Major Components	43
Figure 13: Iridium Network Data Capabilities	45
Figure 14: Iridium Dial-Up Data Service	46
Figure 15: SHOUT nano 100 Mechanical Drawing.....	53

Table of Tables

Table 1: Status Symbols	28
Table 2: Battery Charging Status	28

Acronym List

AES.....	Advanced Encryption Standard
API.....	Application programming interface
AT.....	Attention
BATT.....	Battery
BIS.....	Bureau of Industry and Security
BLE.....	Bluetooth Low Energy
BT.....	Bluetooth
CE.....	Conformité Européenne
CRUD.....	create, read, update, and delete
DAV.....	Data After Voice
DISA.....	Defense Information Systems Agency
DoD.....	Department of Defense
DSN.....	Defense Switch Network
EAR.....	Export Administration Regulations
EMSS.....	Enhanced Mobile Satellite Services
ESBD.....	Enhanced Short Burst Data
FCC.....	Federal Communications Commission
FDMA.....	Frequency-Division Multiple Access
GNSS.....	Global Navigation Satellite System
GPS.....	Global Positioning System
GPX.....	GPS Exchange Format
GSM.....	Global System for Mobile Communication
GUI.....	Graphical User Interface
IMEI.....	International Mobile Equipment Identification
IRDM.....	Iridium
ISP.....	Internet Service Provider
ISU.....	Iridium Subscriber Unit
Kbps.....	kilobits per second
KML.....	Keyhole Markup Language

LED	Light Emitting Diode
LEO.....	Low-Earth Orbit
MMC	Mission Management Center
NIST.....	National Institute of Standards and Technology
NOAA	National Oceanic and Atmospheric Association
NOC.....	Network Operations Center
NORTHCOM	Northern Command
OFAC	Office of Foreign Asset Controls
PMS.....	PECOS Message Structure
PPP.....	Point-to-Point Protocol
PSTN.....	Public Switched Telephone Network
RUDICS	Router-based Unrestricted Digital Internetworking Connectivity Solution
SBD.....	Short Burst Data
SMA	SubMiniature version A
SMS.....	Short Message Service
SMSC.....	Short Message Service Center
STAT	Status
TDD	Time Division Duplex
TDMA	Time-Division Multiple Access
TTKT	Time To Keep Trying
TTL	Transistor–Transistor Logic
USA	United States of America
USB	Universal Serial Bus
USSF	United States Space Force
UTC	Coordinated Universal Time
VAC	Volts (Alternating Current)
VDOP.....	Vertical Dilution of Precision

1 Introduction

This guide pertains to both SHOUT nano 100-01 SBD and SHOUT nano 100-40 ESDB trackers. SHOUT nano 100 is a pocket-sized, low-cost, low-power, Iridium satellite network tracking device. It is designed to relay, via the Iridium satellite network, GNSS/GPS location data and other critical information, such as emergency messages, geofence data, and callouts from the device, and text messages from the NAL SHOUT smartphone app. It has a rugged housing with embedded Iridium, GNSS, and Bluetooth antennas. This device can easily be carried by a person or attached to high value, untethered, or non-powered assets.

The device comprises an Iridium 9603 transceiver module, a GNSS receiver, Bluetooth Low Energy transceiver, low-power microcontrollers, Li-Ion rechargeable battery, and a lightweight, impact-resistant plastic chassis with an organic light-emitting diode (OLED) display and embedded antennas. SHOUT nano 100 can send Short Burst Data® (SBD®) messages over the Iridium satellite network in NAL Research's defined report formats compatible with NAL 9602-LP, 9602-AB, A3LA series modems, and SHOUT series tracking devices. It can also transmit in PECOS Message Structure (PMS), which complies with the Blue Force Tracking Data Format Specification as defined in the document *PECOS Message Definition Specification, 200907-001* Version 1.7 [3].

When requested by an authorized user, NAL Research can equip SHOUT nano 100 with Enhanced Short Burst Data (ESBD) capabilities for use on the United States Space Force (USSF) Enhanced Mobile Satellite Services (EMSS) Gateway. **IMPORTANT:** EMSS-enabled SHOUT nano 100 must first be provisioned (signed up for airtime) with EMSS SBD service before testing or field use. Accessing the USSF EMSS Gateway is not authorized until SHOUT nano 100 is provisioned. Unauthorized attempts to access the USSF EMSS Gateway may result in immediate disabling of the offending device, which must then be returned to NAL Research for repair. See <https://emss.pac.disa.mil/home.shtml> for more information regarding EMSS service provisioning.

SHOUT nano 100 is designed with ultra-low power consumption electronics and is capable of delivering uninterrupted service for up to 20 days at one report per hour. Power consumption can be further reduced by using the device's built-in motion sensor and/or geofencing features to reduce reporting frequency when a platform is not in motion or is outside an area of interest. In

addition to normal tracking, SHOUT nano 100 also has a real-time clock allowing power-up delay as well as scheduled daily call outs.

1.1 Device Description

SHOUT nano 100 contains a Power button/911, an LED status display, an Iridium antenna, a GNSS antenna, Bluetooth antenna, Bluetooth button/911, and a micro USB interface as shown in **Figure 1**. The USB-C interface port is for charging, firmware updates, data collection, and setting parameters using the NAL Research SatTerm application. Using the Emergency/911 button activates the emergency/911 mode and sends an emergency message with an increased reporting rate. For detailed information on the Emergency/911 mode, refer to section **2.2** Activate Emergency/911 .



Figure 1: SHOUT nano 100 External Components

1.2 Accessories



AC Wall Adapter



USB-A to USB-C Cable

Figure 2: SHOUT nano 100 Accessories

2 User Interfaces

2.1 Power/Enter Button

SHOUT nano 100 has a single Power button (see **Figure 1**). Momentarily hold down the button for 2 seconds then release it to turn it off and on again. If the device is sleeping, press the Power/Enter button for 2 seconds to turn it back on. NOTE: Upon waking up, the device will not display the *NAL Splash* screen.

2.2 Activate Emergency/911

The Emergency/911 button (see **Figure 3**) immediately sends a location report with the emergency bit set, and thereafter sends location reports at a rate configured in the 'Emergency Report Rate' parameter until the emergency/911 mode is canceled. All text messages sent when this mode is active also have the emergency flag set.

To active emergency mode:

1. Open the emergency cover and press the Emergency/911 button (see **Figure 3**).



Figure 3: Emergency 911-Activate

The 'Status Symbol' field on the device turns **RED** (see **Figure 4**).



Figure 4: Emergency 911-Status Symbol Field

To deactivate, see section **6.7 Cancel 911**

2.3 USB-C Connector Port



Figure 5: USB Connector Port

The SHOUT nano 100 USB-C connector port is located on the left side of the chassis, as shown in **Figure 5**. This connector has a rubber O-ring sealed cover, which is required in order to achieve the IP67 rating of the device.

2.3.1 USB Data

SHOUT nano 100 communicates with computer equipment using the USB-C port located on the left side of the chassis (see **Figure 5**). The USB-C connection allows configuration of and data collection from SHOUT nano 100 using NAL Research's defined AT commands and NAL's SatTerm console window. These AT commands can be found in the manual *AT Commands for Model*

SHOUT nano 100 [1]; also see section **4.2** Modes of Operation. NAL Research recommends using the SatTerm (Rev A) graphical user interface (GUI) software to configure SHOUT nano 100, instead of trying to memorize various AT commands. The latest version of this software can be downloaded from the NAL Research website (<https://www.nalresearch.com>).

2.3.2 DC Power Inputs

The internal 2000mAh LiPo battery can be charged through SHOUT nano 100's USB-C port using the provided USB-A to USB-C cable. The device can be charged from the provided AC to DC wall adapter or from any USB port capable of outputting 500 mA.

2.4 Bluetooth

SHOUT nano 100 utilizes a Bluetooth Low Energy (BLE) transceiver to provide a secondary command interface path alternative to the USB-C connector port. Like the USB port, this interface can connect with SatTerm running on a Windows PC. You can also establish a Bluetooth connection with a Bluetooth-enabled Android device running the SHOUT nano 100 App (see **Section 5**).

By default, the Bluetooth interface turns off when there has been no data transfer after 10 minutes or when Bluetooth has been disconnected for more than 10 minutes.

3 Initial Setup

The following sections describe the initial device setups for operational use.

3.1 Prepare Device

Prior to using SHOUT nano 100, first purchase airtime from NAL Research or arrange with NAL to provision the device for use on the United States Space Force (USSF) EMSS gateway. An airtime reseller must register the SHOUT nano 100 IMEI number to “point” to a Network Operation Center (NOC) server. This section explains how to quickly set up SHOUT nano 100 as a tracking device.

1. Remove SHOUT nano 100, the wall charger, and the USB cable from the packaging.
2. Open the SHOUT nano 100 USB-C connector port cover and connect the USB cable’s USB-C connector to the USB-C connector port on SHOUT nano 100 (see **Figure 5**).
3. Connect the USB-A connector to the wall charger and plug charger into a wall socket.

3.2 Start Device

Once the device is fully charged, press the Power/Enter button (see **Figure 1**) for 2 seconds, until the *Home* screen displays (see **Figure 6**). The *NAL Research Splash* screen displays momentarily before showing the *Home* screen (see **Figure 6**).



Figure 6: Home Screen

NOTE: If the device is not used for 10 minutes, SHOUT nano 100 enters sleep mode. SHOUT nano 100 can be removed from sleep mode by pressing the Power/Enter button for 2 seconds.

3.3 Charge Device

SHOUT nano 100 ships with a partially charged battery. Before use, charge the device for 1 hour. NOTE: Upon battery depletion, the device should reach full charge within 5-6 hours when continuously plugged in and meets specifications listed in section **2.3.2 DC Power Inputs**.

The time the device takes to fully charge at +22 °C ambient is approximately 5-6 hours from any USB port. The device does not support fast charging. When the device is charging above +45 °C ambient, it will experience charge times longer than 5-6 hours.

1. Plug the wall charger into a 115 Volts (Alternating Current) (VAC) power source.
2. Confirm power is applied to the SHOUT nano 100 USB-C port.

A charging icon appears in the battery icon, as shown in **Figure 7**.



Figure 7: Battery Charging Icon

3.4 AT Command Mode

For scenarios where computer control of the SHOUT nano 100 is desired, use a computer attached to the SHOUT nano 100 USB interface through a USB-C cable. For example, SHOUT nano 100 can be turned off using the AT command **^SHUTDOWN**. If the device is sleeping or in low power in between reporting cycles, pressing the Power/Enter button turns SHOUT nano 100 on for 10 seconds. During this time, take the device out of tracking mode and put it into command mode by entering a sequence of three plus signs, “+++”. If “+++” is not entered within 10 seconds, SHOUT nano 100 goes back to sleep. See section **4.2 Modes of Operation** for a more detailed description of the command mode, and see the NAL document *AT Commands for SHOUT nano 100* [1] for a full list of AT command capabilities.

4 Important Features

4.1 Communication Links

The Iridium network is used to send location reports. To use Iridium service, the International Mobile Equipment Identification (IMEI) number must be activated with an SBD service plan through an authorized Iridium reseller or provisioned by NAL Research on the USSF EMSS Gateway. When an IMEI is provisioned for service, up to 5 SBD delivery destinations can be specified. These are delivery endpoints for the data transmitted by SHOUT nano 100 and can be any combination of 3 types: IP address, email, and IMEI.

4.2 Enhanced Short Burst Data (ESBD) Capability

SHOUT nano 100-40 offers Enhanced Short Burst Data (ESBD) by combining the global coverage of the Iridium satellite constellation with the United States Space Force (USSF) Enhanced Mobile Satellite Service (EMSS) Gateway to provide transmission security (TRANSEC) for approved U.S. Department of Defense (DoD), federal, state/local, and approved allied government users.

ESBD provides the same global one- or two-way messaging capability as legacy SBD, but with added security and improved performance. Protocol enhancements provide faster throughput, resulting in increased transfer rates for messages larger than 70 bytes.

4.2.1 Security and Key Management

SHOUT nano 100-40 provides AES-256 encrypted over-the-air (OTA) signaling to protect user identity and device location information as well as payload data. For additional protection, users can also provide their own encryption for payload data (refer to section 4.6).

SHOUT nano 100-40 is delivered by NAL ready for operation on the EMSS Gateway with all ESBD key material loaded and configured. The user only needs to perform service activation.

4.2.2 Soft Rogue and Hard Rogue

SHOUT nano 100-40 enables authorized users to remotely “lock” or “rogue” the product. Two “rogue” options exist: soft rogue and hard rogue.

For soft rogue, a command is sent to the device from the EMSS Gateway with a “Time of Silence;” SHOUT nano 100-40 will not communicate until the “Time of Silence” has expired. SHOUT nano 100-40 will enforce a minimum of 1 minute and a maximum of 1440 minutes (24 hours). If a “Time of Silence” above 1440 minutes is received from the EMSS Gateway, it will be reduced to 1440 minutes. Similarly, a “Time of Silence” of less than 1 minute will be set to 1 minute. Once the “Time of Silence” has expired, SHOUT nano 100-40 will restart communications.

For hard rogue, a command is sent to SHOUT nano 100-40 from the EMSS Gateway, which will disable the device until an authorized user manually recovers it with a key provided by the EMSS customer support team. To recover from a hard rogue, the user must use AT commands to enter a key that “unbricks” SHOUT nano 100-40.

To initiate a request to soft rogue or hard rogue SHOUT nano 100-40, an authorized user representative (such as the device’s Domain Administrator) should contact the EMSS customer support team, who will confirm which rogue option the authorized user would like to implement.

4.3 Modes of Operation

SHOUT nano 100 is always in either command mode or tracking mode and can be configured to turn on in one of these modes. The factory-set *Start-up Mode* is the tracking mode, which can be changed using the **^START** command. For normal operational tracking scenarios, set the *Start-Up Mode* to tracking mode so that the unit continues tracking after waking up from sleep.

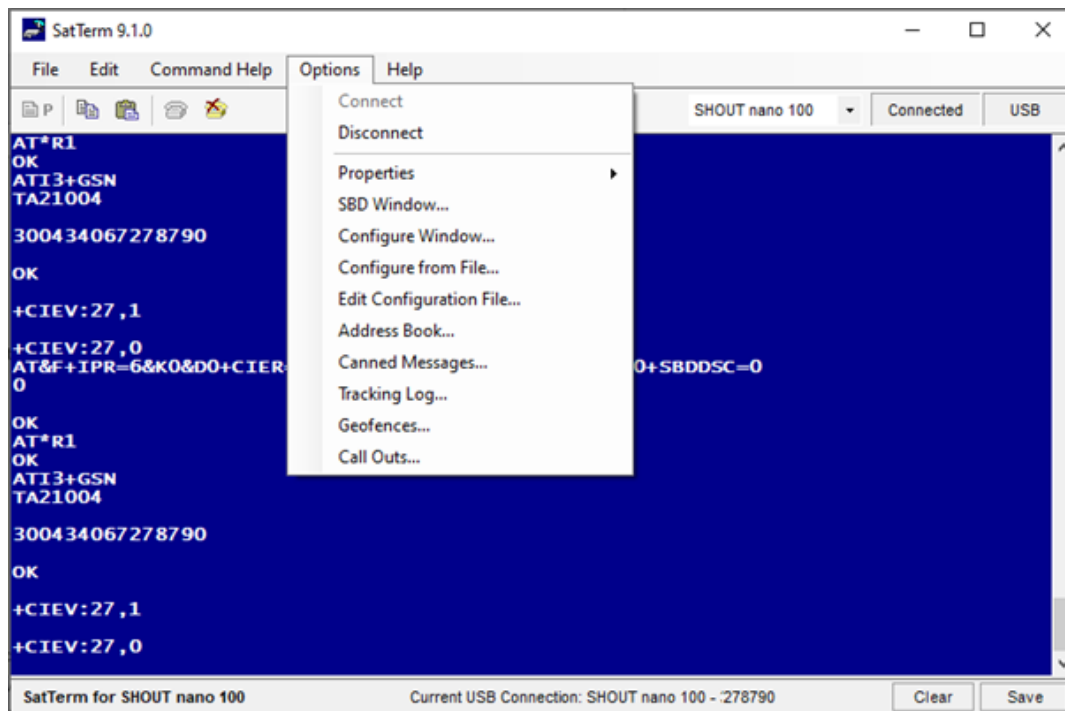


Figure 8 Options Menu and Configure Window Menu Item

4.3.1 Command Mode

When in command mode, SHOUT nano 100 accepts AT commands through the USB connection. The command set is detailed in the document *AT Commands for SHOUT nano 100* [1]. Use the commands to configure operating parameters to allow SHOUT nano 100 to operate as a modem and to query the GNSS receiver. Command mode can be switched to tracking mode by the AT command **^TRK**. To switch back, use the escape sequence **+++**.

4.3.2 Tracking Mode

When in tracking mode, SHOUT nano 100 automatically transmits position reports using parameters contained in a tracking profile. Refer to *the SatTerm for SHOUT nano 100 Manual* [5]. The device can transmit messages in both NAL Research's defined report formats and also according to the PECOS Message Structure (PMS) compatible with the US Northern Command (NORTHCOM) Mission Management Center (MMC) server. The PMS complies with the Blue Force Tracking Data Format Specification as defined in the document *PECOS Message Definition Specification, 200907-001 Version 1.7* [3].

The SHOUT nano 100 tracking mode has configuration parameters that control the reporting capabilities and power consumption. The device can be configured to send reports at an interval

ranging from continuous to once every 7 days. SHOUT nano 100 can operate in a low-power mode whereby the device turns off and sleeps between reports.

Tracking may enter the low-power mode while the USB and Bluetooth user interfaces are in use. Use the command **AT^PWRAO** (Power Always On) to keep SHOUT nano 100 turned on in this situation. This setting prevents the device from sleeping and greatly increases power consumption; disable this command when finished using the USB or Bluetooth interface. Refer to the document *AT Commands for SHOUT nano 100* [1] for additional details.

The more commonly used tracking parameters are “Time Between Reports” (**^TBR**), “Time to Keep Trying” (**^TTKT**), and “Callable” (**^CAL**). The following features can also be utilized to further tailor tracking mode to a specific application: “GNSS power” (**^GAO**), “communication link availability” (**^LNK**), “profile selection” (**^TPN**, **^TPT**, **^TPE**), motion detection, and geofencing.

“Time Between Reports” (**^TBR**) and “Time to Keep Trying” (**^TTKT**) adjust how often to send reports and how long SHOUT nano 100 tries to achieve a successful report transmission. Decreasing the “Time Between Reports” increases data points for more detailed situational awareness and increasing the “Time to Keep Trying” improves the chances of transmission success. Both options also directly affect the SHOUT nano 100 power consumption.

For supporting message-receiving scenarios, referred to as “Callable,” the SHOUT nano 100 Iridium modem can be set to be always on by using the **^CAL** command. This configuration prevents the device from sleeping and greatly increases power consumption.

To facilitate power management and time to acquire location, configure SHOUT nano 100 to control the power state of the GNSS module. The module can be set to always on using the command **^GAO**, which prevents the GNSS from turning off after obtaining a valid fix.

While in tracking mode, SHOUT nano 100 can load tracking profiles dynamically. By default, there are 2 tracking profiles set aside for normal tracking and emergency tracking. Typically, when tracking mode starts, the tracking profile for normal tracking is loaded, specified by the “Tracking Profile Normal” (**^TPN**) setting. When the emergency mode is triggered, the tracking mode switches to using the ‘Tracking’ profile for emergency tracking, specified by the “Tracking Profile Emergency” (**^TPE**) setting. This allows SHOUT nano 100 to be configured to operate differently when there is an external stimulus.

Tracking mode also loads a different tracking profile if geofences are enabled and SHOUT nano 100 enters or exits a geofence. Priorities are assigned to the different stimuli and SHOUT nano 100 only switches to the associated tracking profile if it has a higher priority. Emergency tracking has the highest priority, geofence is the second highest, and normal tracking is the default.

4.4 Call-Outs and Turn-On Delay

Using an onboard real-time clock, SHOUT nano 100 can be configured to send daily call-out reports at specified Coordinated Universal Time (UTC) times. These call-out reports are in addition to tracking reports sent at a predefined tracking interval, and they are indistinguishable from each other. Call-outs can be used as a heartbeat to determine if the device is still operational (refer to the *SatTerm for SHOUT nano 100 Manual* [5]).

In addition to using the onboard real-time clock, SHOUT nano 100 can be configured for a turn-on delay. A turn-on delay is set for a specific UTC time and date up to 45 days in the future. When a delay is set and tracking is started, the device remains in its low-power sleep mode until the configured date and time, upon which the device will turn on automatically and enter the start-up mode. This is useful for conserving battery power while the tracker is in transit to a destination.

4.5 Geofencing

SHOUT nano 100 can use location information from its GNSS receiver to determine whether it has entered or exited the bounds of preconfigured geofences. A geofence is a set of connected latitude and longitude coordinates that defines a region or zone of interest. Refer to *the SatTerm for SHOUT nano 100 Manual* [5]. A geofence is defined by a minimum of 3 coordinates and a maximum of 50. Multiple geofences can be configured, each with a unique set of tracking parameters that cause SHOUT nano 100 to change its tracking behavior while in a specific geofence. Each geofence can also be configured to send a report upon entering and exiting the defined geofence region. In addition, geofences can be configured to turn off the Iridium modem for regions that require radio silence.

4.6 Motion Detection

The device's built-in omnidirectional movement sensor can reliably detect motion and functions regardless of how SHOUT nano 100 is mounted or aligned. It is sensitive to both tilt (static acceleration) and vibration (dynamic acceleration). The signal level is fed directly into the SHOUT nano 100 microcontroller to wake the device out of low-power mode when activity is sensed and to transmit a location report. The motion sensor has a variety of settings that impact its detection sensitivity. The motion sensor can be enabled or disabled (refer to *the SatTerm for SHOUT nano 100 Manual* [5]).

4.7 Encryption

SHOUT nano 100 can be configured to encrypt/decrypt all transmitted and received payload data using 256-bit Advanced Encryption Standard (AES) encryption. To enable encryption, assign a cryptographic administrator for the device to be responsible for modifying the encryption and decryption keys and setting the device to use encryption (refer to *the SatTerm for SHOUT nano 100 Manual* [5]). The 256-bit AES encryption algorithms implemented here comply with NIST FIPS 140-2 (see the following documents (<https://csrc.nist.gov/publications/detail/fips/140/2/final>):

1. *Security Requirements for Cryptographic Modules*, FIPS PUB 140-2, US Department of Commerce, National Institute of Standards and Technology (NIST), May 25, 2001
2. *Security Requirements for Cryptographic Modules, Annex A: Approved Security Functions* for FIPS PUB 140-2, US Department of Commerce, National Institute of Standards and Technology, February 19, 2003)

4.8 Remote Updates

Using the configurable required remote update password, SHOUT nano 100 can be configured over the air through the remote update option. This allows remote, unattended trackers to be reconfigured without requiring direct access to the device. All of the tracking profile parameters and most of the general parameters can be configured via remote updates (refer to *the SatTerm for SHOUT nano 100 Manual* [5]). NAL Research provides 2 software applications that can be used to compose and transmit remote updates: *Server for Trackers* and *Remote Configure*. These

programs can be downloaded from the NAL Research's website (<https://www.nalresearch.com/>).

Refer to the software applications for the list of remotely configurable parameters.

5 SHOUT App

SHOUT nano 100 can communicate with a mobile device by running the SHOUT App. The SHOUT App, developed by NAL Research, is available for download from the Google Play Store and Apple App Store. This mobile application provides all the capabilities of the display screens seen on other NAL Research tracking devices such as the SHOUT nano and SHOUT ts. These capabilities include device status; text messaging; managing tracking parameters such as reporting rate, reporting format, and geofencing; diagnostic utilities; and configuring SHOUT nano 100. The *SHOUT App User Guide* [4] document provides more details regarding the SHOUT App.

5.1 Pairing SHOUT nano 100 to a Mobile Device

This section provides instructions on how to pair SHOUT nano 100 with an Android and iOS mobile device.

1. Turn on the mobile device and install the *SHOUT App* [4], if not already installed.

- Android: <https://play.google.com/store/apps/details?id=app.android.nal>
- iOS: <https://apps.apple.com/us/app/nal-shout/id1594271549>

2. Enable Bluetooth on SHOUT nano 100 (see section 6.8 Enable BT Pairing/ Passkey).

IMPORTANT: Bluetooth must be enabled on SHOUT nano 100 before opening the SHOUT App. A 'white' Bluetooth icon indicates Bluetooth is enabled.

3. Open the *SHOUT App* on the mobile device.

IMPORTANT: The SHOUT App performs a filtered scan for "SHOUT"-named devices on its own and connects to unpaired devices first, after attempting to pair with them. Once paired to SHOUT nano 100, the SHOUT App remembers the pairing and reconnects to SHOUT nano 100 first on start. For information on the SHOUT App, refer to the *SHOUT App User Guide* [4].

6 Using SHOUT nano 100

6.1 Home Screen

Immediately after the device powers up, SHOUT nano 100 momentarily displays the NAL Research logo followed by the *Home* screen, as shown in **Figure 9**.



Figure 9: Home Screen

The *Home* screen menu displays the following functionalities:

- Messaging (see section 6.4)
- Configuration (see section 6.5)
- Utilities (see section 6.6)
- Cancel 911 (see section 6.7)
- Bluetooth pairing (see section 6.8)
- Unit Info (see section 6.9)

Use the keypad arrow buttons to navigate the menu and the Power/Enter button to select a desired menu option. The 'Device Status Symbols' field displays at the top of the *Home* screen. Some symbols do not appear until an event is initiated, such as sending or receiving a message.

NOTE: Scroll down the *Home* screen to view the remaining functions.

6.2 Status Symbols

Table 1: Status Symbols


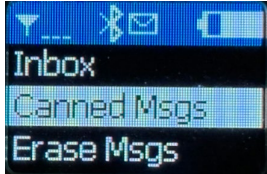



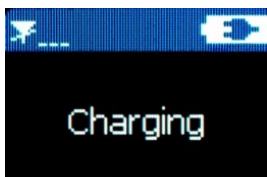



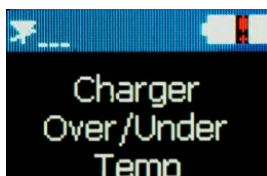


	Denotes the Iridium transceiver is off. The Iridium transceiver is kept off to preserve battery life until a message is required to be transmitted.
	Denotes the Iridium transceiver is on with real-time signal strength represented by the number to the right of the hash tags. The signal strength can range from the lowest of zero to the highest number of 3. During transmission, the antenna must have a clear view of the sky. SHOUT nano 100 cannot send reports from inside a building.
	No icon displays when the GNSS receiver is off. The GNSS receiver is always kept off to preserve battery life until time, date, or position information is needed. Blank: GNSS receiver turned off
N R 2 3 T	N: No Fix R: Dead Reckoning 2: 2D fix or dead reckoning 3: 3D fix with HDOP higher than 2.0. T: Time only Blank: GNSS receiver turned off
	Denotes one or more unread messages are in the Inbox.
	Denotes one or more messages are in the Outbox ready to be sent, or one or more messages in queue failed to send.

6.3 Battery Charging Status

Table 2 displays the various battery charging status.

Table 2: Battery Charging Status

Icon	Description	UI Screen
	Battery indicator totally filled indicates fully charged.	

Icon	Description	UI Screen
	Normal battery icon with white color indicates current battery level.	
	Battery icon with green color indicates charging is complete.	
	Battery icon with plug symbol indicates the battery is charging.	
	Battery icon with yellow plug symbol indicates the charging rate is slowed due to high operating temperature.	
	Battery icon with ! over top indicates the operating temperature is out of range for safe battery charging.	
	Battery icon indicates charger disabled by the Admin (no corresponding icon, set by AT^BATTCHRG=0)	

6.4 Messaging

The Messaging function allows you to view incoming messages and send canned messages.

6.4.1 Inbox

1. Select **Messaging>Inbox**.



The *Messaging* window displays.



2. Select the applicable report.


A *Recv'd* message associated with the selected message displays.




3. Scroll down to view the entire message (tracking data).

6.4.2 Canned Messages


1. Select **Messaging>Canned Msgs**.




The *Canned Msgs* window displays.



2. Select the applicable canned message (report).
3. Select a Contact.



A *Send* message displays.



A success message momentarily displays.

4. Select **Yes**.


6.4.3 Erase Messages

The Erase Messages function allows you to erase all messages and inbox messages.


1. Select **Messaging**.



2. Select **Erase Msgs**.




3. The following screen appears.

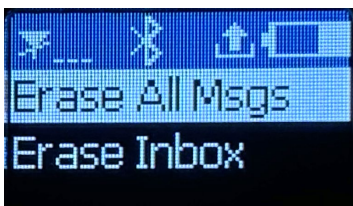

4. Select **Erase All Msgs**.

A *Confirmation* window displays.

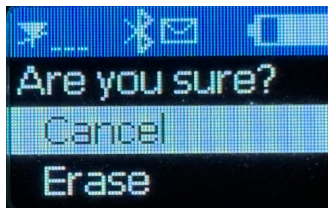


5. Select **Erase**.


This erases all message from the device. A 'Success' message momentarily displays.

6.4.3.1 Erase Inbox

1. Select **Erase Inbox**.



A *Confirmation* window displays.

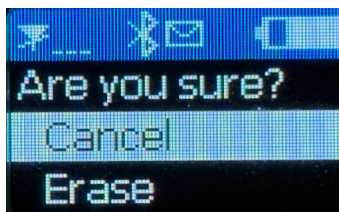

2. Select **Erase**.

6.5 Configuration


The Configuration function allows you to enable tracking, set track report rate, and set the check mailbox rate.

6.5.1 Enable Tracking

1. Select **Configuration>Enable Tracking**.



The *Enable/Disable* window displays.




2. Select **Enable**.

6.5.2 Track Report Rate

1. Select **Configuration>Trk Rep Rate**.



The *Track Report Rate* window displays.




The current track report rate displays at the top of the window.


2. Select (scroll for) the desired track report rate.

6.5.3 Check Mailbox Rate

1. Select **Configuration>Chk Mbx Rate**.



The *Check Mailbox Rate* window displays.



The current check mailbox rate displays at the top of the window.


2. Select (scroll for) the desired mailbox rate.

6.5.4 Contrast

1. Select **Configuration>Contrast**.



The *Contrast* window displays.




2. Increase/decrease the contrast using the **left/right navigation** buttons on the Shout nano 100 device.

6.5.5 Backlight

1. Select **Configuration>Backlight**.




The *Backlight* window displays.




2. Select (scroll for) the desired duration of the backlight.

6.5.6 Reset Settings

1. Select **Configuration>Reset Settings**.



A *Confirmation* window displays.

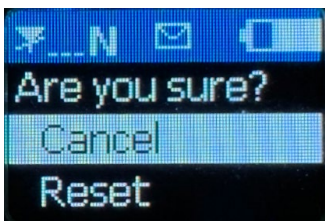


2. Select **Reset**.

This resets the device to default factory settings.

6.6 Utilities

The Utilities function allows you to check GPS and show battery info.

1. Select **Utilities** on the *Home* screen.



The *GPS* screen displays.

6.6.1 Check GPS

The Check GPS function displays the current GPS position. It can list the GPS position in latitude/longitude or MGRS format, depending on the mode set by AT command **^POSFMT**.

1. Select **Check GPS**.




GPS data displays.



6.6.2 Reset GPS

The Reset GPS function will erase aiding data stored in the GPS receiver. This option should be used in the rare event SHOUT nano 100 is failing to acquire a GPS position after being relocated a long distance.

1. Select **Reset GPS**.




A *Confirmation* message displays.

2. Select **Reset**.


6.7 Cancel 911

The Cancel 911 function allows you cancel the 911 message to the NOC, and the device returns back to normal operations.

1. Select **Cancel 911** on the *Home* screen.



A *Confirmation* window displays.



2. Select **Yes**.

A 'Success' message displays.

6.8 Enable BT Pairing/ Passkey


The BT Pairing function enables the device to be discovered and paired with another device, which has Bluetooth pairing capabilities.

NOTE: Enable Passkey is optional.


1. Select **BT Pairing**.




2. Select **Enable BT**.



3. Select **Enable**.



A white Bluetooth icon indicates SHOUT nano 100 is Bluetooth enabled.




A green (Bluetooth) icon indicates SHOUT nano 100 is connected to a Bluetooth device.

6.9 Unit Info


The Unit Info function displays the following data on the device: IMEI, APP firmware version, power firmware version, boot firmware version, and Iridium firmware version.

1. Select **Unit Info** on the *Home* screen.



The *Unit Info* window displays.

2. Scroll down to see all of the data.



7 Turn Off Device

1. Press the Power/Enter button as shown in **Figure 10** (white box).



Figure 10 Power/Enter Button

The *Powering Off* message on the device screen indicates it is turning off as shown in **Figure 11** below.

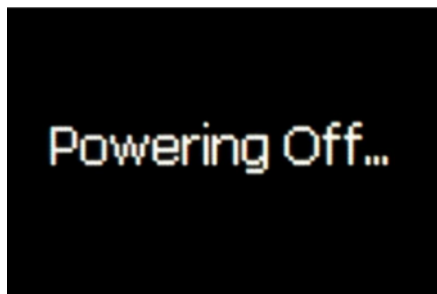


Figure 11 Powering Off Message

NOTE: Abnormal Shutdown messages are noted below.

- *Thermal Shutdown*: This message indicates SHOUT nano 100 is outside the safe battery operating temperature range.
- *Battery Undervoltage Shutdown*: This message indicates battery is under the voltage required for device operation. The device should be recharged before continuing use.

8 Technical Support

For technical support, please contact us at:

Phone: 571-833-2169

Email: support@nalresearch.com

Technical documents are also available to download on NAL Research's website

www.nalresearch.com.

Appendix A: Standards Compliance

The Iridium 9603 transceiver inside SHOUT nano 100 is designed to meet the regulatory requirements for approval by the Federal Communications Commission (FCC), Canada, and Conformité Européenne (CE), assuming an antenna with a gain of approximately 3 dBic and adequate shielding. The 9603 transceiver is tested to the regulatory and technical certifications shown in the table below.

Regulatory Approvals	Radio Tests	EMC Tests	Mechanical/ Electrical Tests
FCC	FCC CFR47 Parts 2, 15, and 25	EN61000-4-2: 1995/A2: 2001 Part 4.2 EN61000-4-3: 2002 Part 4.3 EN61000-4-4: 2004 EN61000-4-6: 1996/A1: 2001 Part 4.6	
Industry Canada	Industry Canada RSS170 Issue 1, Rev 1, November 6, 1999	EN55022: 2006	
CE	ETSI EN 301 441 V1.1.1 (2000-05)	ETSI EN 301 489-1 V1.8.1 (2008-04) ETSI EN 301 489-20 V1.2.1 (2002-11)	EN60950-1:2006 Part 1

Appendix B: Export Compliance

SHOUT nano 100 is controlled by the export laws and regulations of the United States of America (U.S.). It is the policy of NAL Research to fully comply with all U.S. export and economic sanction laws and regulations. The export of NAL Research products, services, hardware, software, and technology must be made only in accordance with the laws, regulations, and licensing requirements of the U.S. government. NAL Research customers must also comply with these laws and regulations. Failure to comply can result in the imposition of fines and penalties, the loss of export privileges, and termination of your contractual agreements with NAL Research.

The export and re-export of NAL Research products and services are subject to regulation by the Export Administration Regulations (15 CFR 730-744), as administered by the U.S. Department of Commerce, Bureau of Industry and Security (BIS).

See: <https://www.bis.gov/> for further information on BIS and the Export Administration Regulations (EAR). Additional export restrictions are administered by the U.S. Department of the Treasury's Office of Foreign Asset Controls (OFAC). See: <http://www.ustreas.gov/ofac> for further information on OFAC and its requirements.

Appendix C: The Iridium Network

The Iridium satellite network is owned and operated by Iridium Communications Inc. It is constructed as a constellation of 66 satellites in low-earth orbit (LEO), terrestrial gateways, and Iridium subscriber units (ISUs). An ISU can either be an Iridium satellite phone or various types of modems. The satellites are placed in an approximate polar orbit at an altitude of 780 km. There are 6 polar planes populated with 11 satellites per orbit constituting the 66-satellite constellation. The near polar orbits of the Iridium constellation provide truly real-time and global coverage from pole-to-pole.

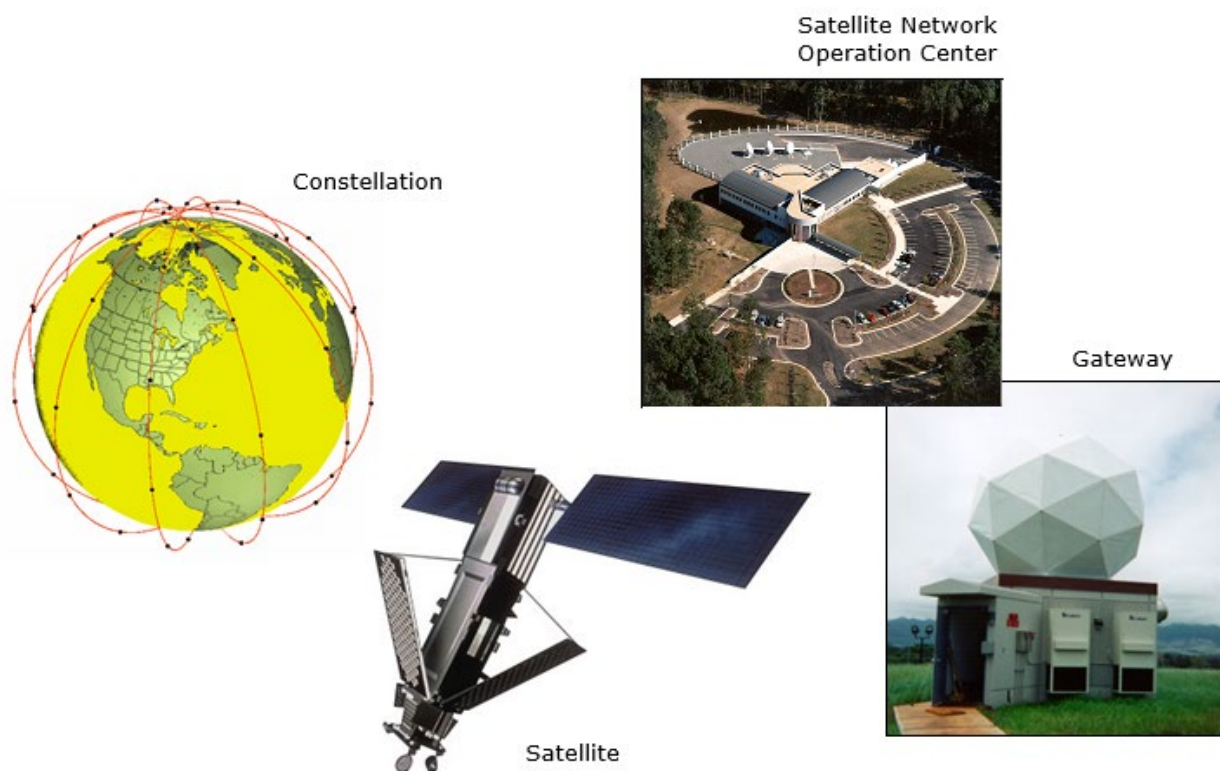


Figure 12: Iridium Network Major Components

The Iridium network is designed to operate in the band of 1616.0 to 1626.5 MHz, although the exact frequencies used depend on the local regulating authorities and issued licenses in any particular region. Each satellite projects 48 beams on the surface of earth, which may be viewed as providing coverage cells on the ground similar to terrestrial systems. Each beam is approximately 600 km in diameter. The 66-satellite constellation has the potential to support a total of 3,168 spot beams; however, as the satellite orbits converge at the poles, overlapping

beams are shut down. The satellite footprint is approximately 4,700 km in diameter. Under each footprint, a satellite is power-limited to approximately 1,100 simultaneous circuits.

The Iridium network uses a time division duplex (TDD) method and transmits and receives in an allotted time window within the frame structure. Since the system is TDD, the ISU transmit and receive in the same frequency band. The access technology is a frequency division multiple access/time division multiple access (FDMA/TDMA) method whereby an ISU is assigned a channel composed of a frequency and timeslot in any particular beam. Channel assignments may be changed across cell/beam boundaries and are controlled by the satellite. The system provides an average link margin of 13.1 dB.

Although there are multiple gateways, a user is registered to a single gateway. The gateways perform call connection setup and administrative duties such as billing and resource management. The satellite constellation provides connectivity between users, from a user to the Iridium system gateway, and between gateways. Within the Iridium network architecture, the satellites are cross-linked, which allows ISU-to-ISU communication independent of gateway intervention once the call connection is established.

There are currently 2 commercial Iridium gateways located in Arizona, U.S., and Fucino, Italy. The U.S. government owns and operates an Iridium gateway located in Hawaii, U.S. Each gateway generates and controls all user information pertaining to its registered users, such as user identity, geolocation, and billing items. The gateway also provides connectivity from the Iridium system to the terrestrial-based networks such as the public switched telephone network (PSTN) or the internet.

C.1 Iridium Network Data Capabilities

For data communications, the Iridium network supports 5 different modes of operation as shown in **Figure 13**: dial-up data service, direct internet connection, SBD, short-messaging service (SMS), and router-based unrestricted digital internetworking connectivity solution (RUDICS).

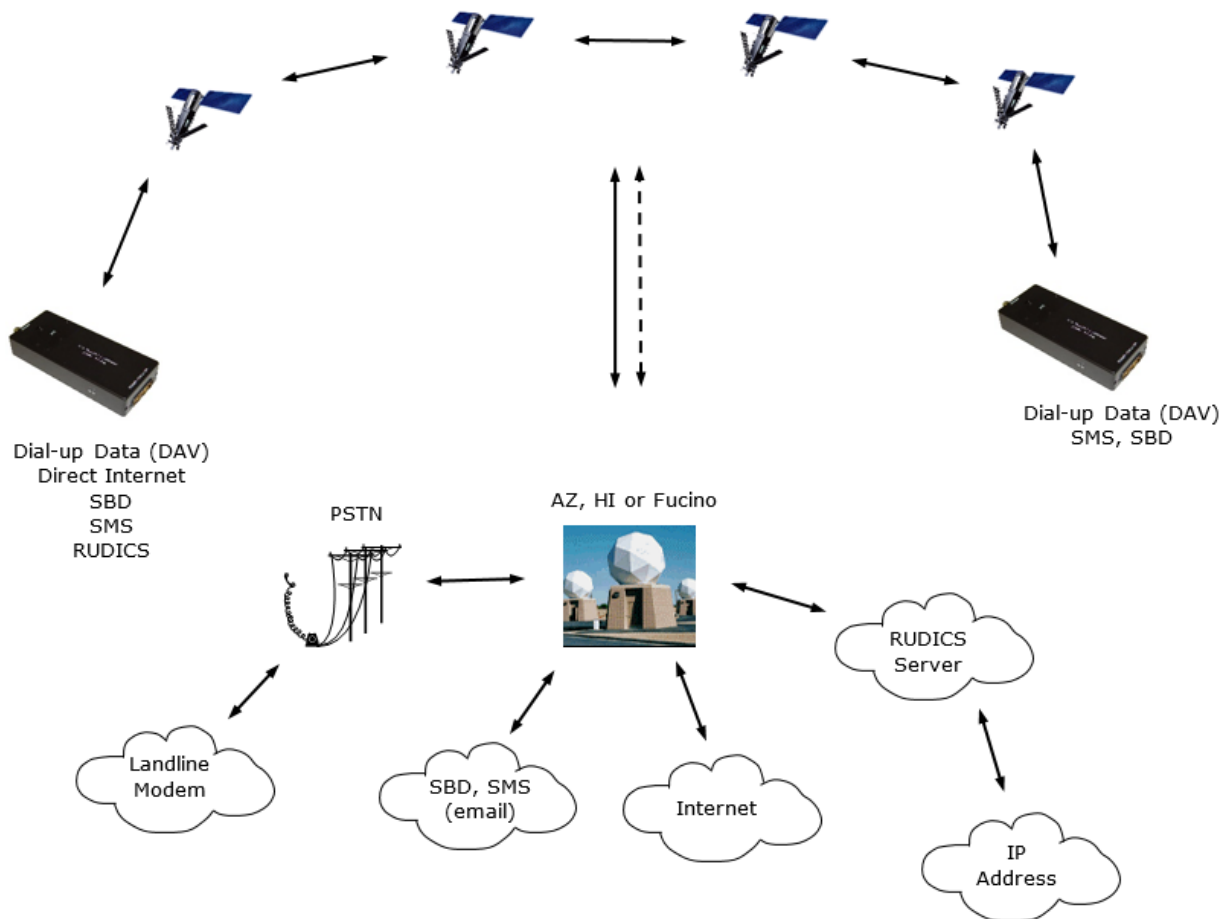


Figure 13: Iridium Network Data Capabilities

C.1.1 Dial-Up Data Service

Dial-up data service provides connectivity through the Iridium satellite network to another Iridium modem, to the PSTN, to the Defense Switch Network (DSN), to a remote LAN (e.g., a corporate network), or to an internet service provider (ISP) at a nominal data rate of 2.4 kilobits per second (kbps). The connection time involving user authentication and handshaking (or modem training) can range from 15 to 30 seconds. For an Iridium-to-Iridium call, dial-up data service offers an additional option known as Data After Voice (DAV). Similar to a voice call, a DAV call is routed directly from one Iridium modem to another Iridium modem without going through the gateway.

The Iridium dial-up data service, as shown in **Figure 14**, functions in much the same way as the PSTN dial-up connectivity. From the perspective of a computer, the Iridium modem is just another external modem. The only difference is that the dialed telephone number must conform to the international dialing pattern used by Iridium. When a data call is placed, the Iridium

modem actually dials and initiates a connection with the Iridium gateway through the Iridium satellite constellation. Because the Iridium modem is requesting to establish a data connection, the switch at the gateway routes the call through another modem. The modem at the Iridium gateway then dials into and connects to another modem at the other end. **Figure 14** illustrates how an Iridium dial-up data service call is routed. The handshaking and protocols established between the modems are independent of the Iridium network.

For those ISU-to-ISU dial-up calls where data transmission delay is critical, such as the application of TCP/IP protocol, DAV should be considered in the design. This option eliminates the Iridium gateway once authentication and registration is completed, allowing ISU-to-ISU communication without the gateway in the loop.

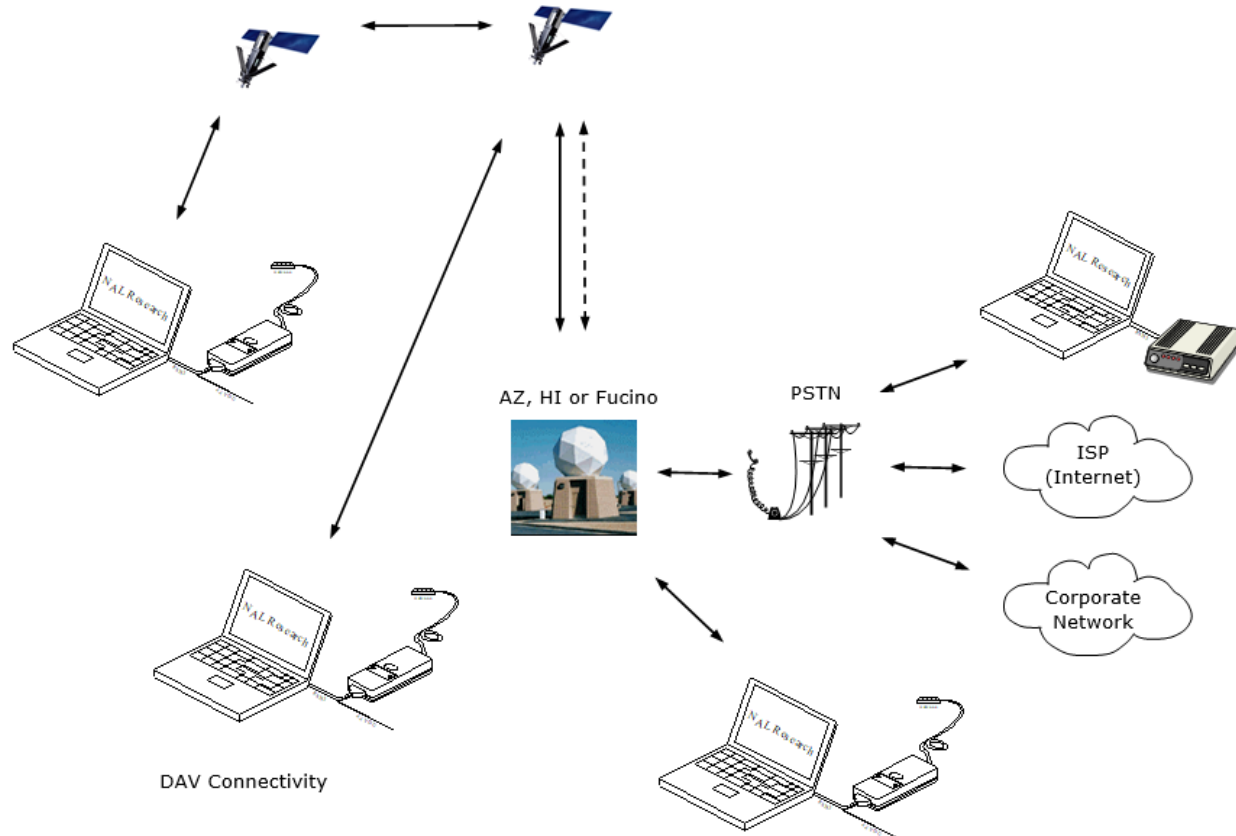


Figure 14: Iridium Dial-Up Data Service

C.1.2 Direct Internet Connection

The Iridium Direct Internet service allows users to connect to the internet via the Iridium gateway without having to sign up with an internet service provider. This service utilizes a dedicated Apollo Server at the Iridium gateway, which provides high-speed connectivity to the

internet and optimizes server-to-Iridium modem communications. The dial-up networking setup is similar to the dial-up networking setup for a landline telephone. The only difference is that the dialed telephone number is an international number provided by Iridium. **Figure 14** illustrates how an Iridium internet call is routed.

Direct Internet service can be enhanced using Windows-based emulated point-to-point protocol (PPP) called the Apollo Emulator. With the use of the Apollo Emulator software instead of Microsoft Windows dial-up networking, Direct Internet service can reduce connection time and improve data throughput. In addition, the Apollo Emulator offers a feature called Smart Connect™, which manages airtime by seamlessly connecting and disconnecting a user through the Iridium system. Airtime charges accumulate only while the call is connected. Improved effective data throughput is achieved with user-transparent data compression. The channel rate is still 2.4 kbps. However, 10 kbps effective throughput can be achieved depending on content (graphics and images result in lower effective throughput).

C.1.3 RUDICS Data

RUDICS is an enhanced gateway termination and origination capability for circuit-switched data calls across the Iridium satellite network. When an Iridium modem places a call to the RUDICS server located at the Iridium gateway, the RUDICS server connects the call to a predefined IP address, allowing an end-to-end IP connection between the host application and the Iridium modem. There are 3 key benefits of using RUDICS over the conventional PSTN circuit-switched data connectivity or mobile-to-mobile data solutions: (1) elimination of analog modem training time; (2) increased call connection quality, reliability, and maximized throughput; and (3) protocol independence.

C.1.4 Short Burst Data

SBD is a simple and efficient bidirectional transport capability used to transfer messages with sizes ranging from zero (a mailbox check) to 1960 bytes. SBD takes advantage of signals within the existing air interface but without using the dedicated traffic channels. As a result, small amounts of data can be transferred more efficiently than those associated with circuit-switched data calls. Messages that originate from an Iridium modem can be delivered to a variety of destinations. Commonly, data are delivered across terrestrial communications networks (NIPRNet

and internet) to servers and applications that process data from one or multiple fielded Iridium modems. SBD service also supports the transfer of messages to Iridium modems, where messages may originate from terrestrial sources. Delivery methods and options are initially configured when the Iridium modem is first purchased and may be easily modified via webpages at a later time.

C.1.5 Short Messaging Service

SMS is a mechanism to deliver short data messages over the Iridium satellite network to the NIPRNet/internet. Iridium SMS incorporates a subset of the GSM SMS features. Each SMS message can be up to 160 text characters (7-bit coded) in length. The text characters are based on a 7-bit alphabet, which is encoded and transmitted as 8-bit data, hence the 140 octet (byte) maximum message size.

SMS is a store-and-forward method of transmitting messages to and from an Iridium modem. The short message from the modem is stored in a central Short Message Service Center (SMSC), which then forwards it to the destination. If the recipient is not available, the SMSC attempts to deliver the SMS message until it is delivered or the validity period expires. SMS supports a limited confirmation of message delivery. The sender of the short message can request to receive a return message notifying them whether the short message has been delivered. With this option, the originator gets a confirmation that the message was delivered to the SMSC. Unlike standard GSM, the Iridium SMS can only acknowledge that the message was delivered to the SMSC and not the end destination.

SMS messages can be sent and received simultaneously while a voice call is in progress. This is possible because SMS messages travel over and above the radio channel using the signaling path, whereas the voice call uses a dedicated “traffic” radio channel for the duration of the call.

C.2 Iridium Geolocation

The Iridium network makes calculations of the geographical location (geolocation) of an ISU each time a call is placed. The technique employed to determine the geolocation of an ISU is based on ISU measurements and satellite propagation delay and Doppler frequency shift. These measurements are used to estimate cosines of spherical angles that identify the ISU’s location relative to the satellite by the gateway.

The Iridium network can locate an ISU to within 10 km only about 78% of the time. The so-called error ellipse can have a large eccentricity with the major axis oriented in the azimuth dimension and the minor axis oriented in the radial dimension. The position of the ISU in the radial dimension relative to the satellite can almost always be determined to within 10 km with just one measurement. Errors in the azimuth dimension relative to the satellite are largest along the satellite's ground path and tend to increase with distance from the satellite. Geolocation errors in the east-west dimension, therefore, are sometimes more than 100 times greater than in the north-south dimension.

Appendix D: Design Specifications

D.1 Mechanical Specifications

Dimensions	118.6mm x 59.4mm x 25.1mm (4.67" x 2.34" x .99")
Weight	135 g (4.8 oz.)
Enclosure Material:	Hard ABS/PC plastic
Interface Connector:	USB-C receptacle
Antennas:	Iridium, GNSS and embedded Bluetooth
ON/OFF and Arrow buttons:	Dome push buttons

D.2 Iridium RF Specifications

Operating Frequency:	1616.0 to 1626.5 MHz
Duplexing Method:	TDD
Multiplexing Method:	TDMA/FDMA
RF TX output power (average):	1.6 W
Rx Sensitivity at 50Ω (typical):	−117 dBm
Link Margin–Downlink:	13 dB
Link Margin–Uplink:	7 dB

D.3 GNSS Specifications

Type of GNSS Receiver:	u-blox MAX-8MQ
Receiver Type:	72-Channel GPS L1 C/A, SBAS, QZSS, GLONASS
Update Rate:	4 Hz
Accuracy:	Position: 2.5 meters (8.2 feet) CEP Position SBAS: 2.0 meters (6.6 feet) CEP
Acquisition (typical):	Hot starts: 1 second Aided starts: 2 seconds Cold starts: 29 seconds
Sensitivity:	Tracking: −166 dBm Reacquisition: −160 dBm

Cold starts: –148 dBm

Operational Limits:..... Altitude: 50,000 meters (164,000 feet)

Velocity: 500 m/s (1,640 feet/second)

Dynamics: $\leq 4\text{ g}$

As long as power is provided to SHOUT nano 100, the GNSS receiver provides real-time clock functionality and stores ephemeris data in its memory before turning off (sleeping between reports). The ephemeris data is valid up to 2 hours and can be used in future startup to improve time-to-first-fix.

D.4 Bluetooth RF Specifications

Operating Frequency: 2.4 GHz

Protocol: Bluetooth Low Energy v4.0

Power Output: +10 dBm

Sensitivity:..... -93 dBm

D.5 Electrical Specifications

Internal Battery Type: Rechargeable Li-Polymer 2000mAh 3.7V

Maximum Input Power Consumption: 2.5W (500mA @ +5 VDC)

Maximum Battery Charging Power Consumption.....2W (400mA @ +5 VDC).

SHOUT nano 100 Charging Supply Voltage: +5 Volts

Supplied Charger Output Power:10W (2A @ +5 VDC)

D.6 Environmental Specifications

Operating Temperature Range: –20°C to +50°C (–4°F to +122°F)

Charging Temperature Range: –0°C to +45°C (+32°F to +113°F)

Engineered to Meet Ingress Protection: IP67

Engineered to Meet Operating Humidity:..... $\leq 75\%$ RH

D.7 Data I/O Specifications

Short-Burst Data Mobile-Originated: 340 bytes per message (Iridium)

Short-Burst Data Mobile-Terminated: 270 bytes per message (Iridium)

Multi-Interface Connector: USB-C

Software Interface: AT commands via USB

D.8 Related Hardware

AC Power Adapter:..... LA-3098 (100–240 VAC, 47–60 Hz input)

12 V Car Adapter:..... LA-7021 (12 VDC car battery input)

Appendix E: SHOUT nano 100 Mechanical Drawing

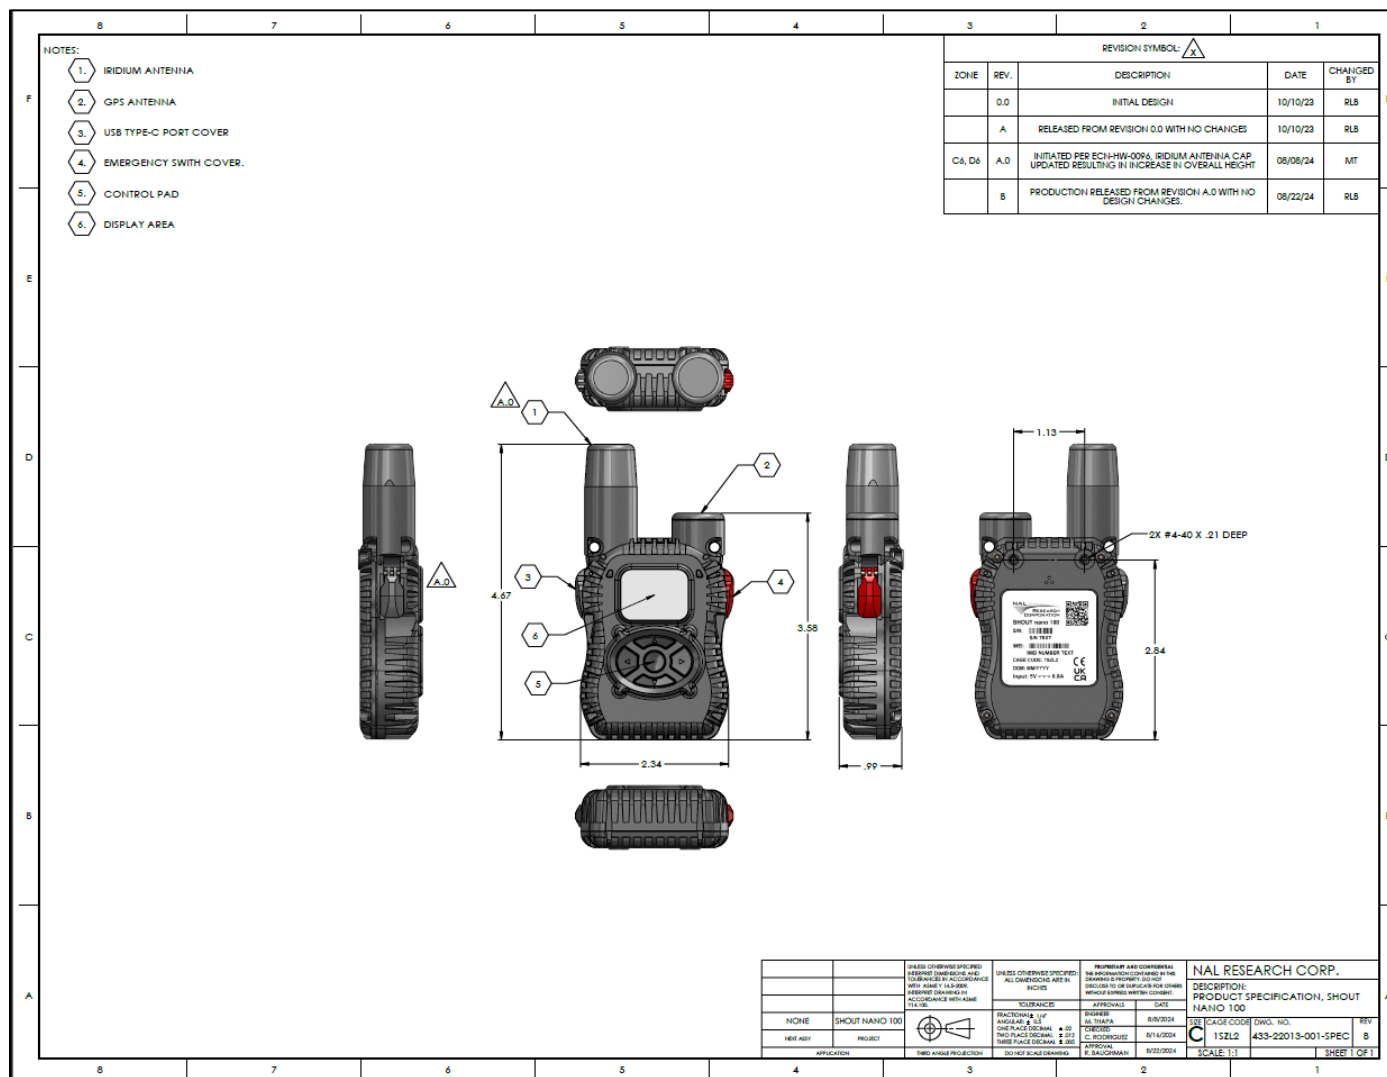


Figure 15: SHOUT nano 100 Mechanical Drawing

Appendix F: Storage and Maintenance

1. Devices should be stored in a cool, dry, well-ventilated area. DO NOT store the SHOUT nano 100 units in direct sunlight, which may expose them to extreme temperatures. Maintain temperature and humidity levels between 10-27° Celsius and 30-50%, respectively.
2. When storing the SHOUT nano 100 devices for extended periods, store at a half-charged state or 50% on-battery level indicator. Refer to [section 6.3](#) for charging status indication.
3. Units with state of charge greater than 50% must be discharged to 50% level prior to long term storage (more than 2 weeks).
4. You must turn off SHOUT nano 100 prior to long-term storage. Refer to [section 3.2](#) on Power/Enter button usage.
5. Devices in long-term storage shall be inspected by the user **every 3 months** and checked to ensure that charge is still around 50%. Units below this state of charge must be re-charged to this range prior to long term re-storage.