


Quicksilver Portable Satellite Modem

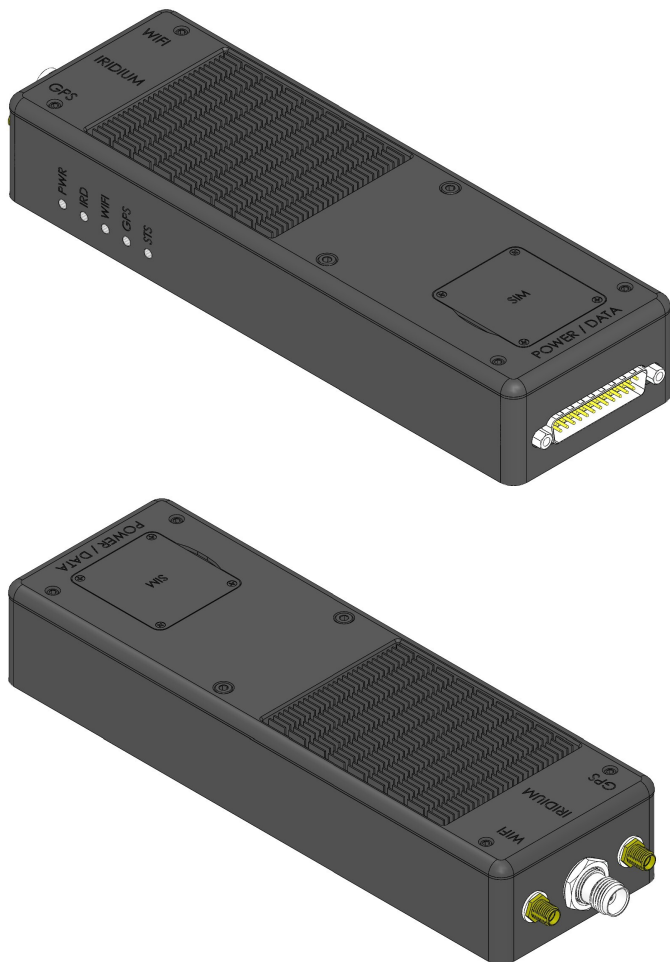

General Description

- Flexible Integration Platform
- Integrated Iridium Certus 9770 transceiver
- Certus Service(s): Background IP Data
- Up to 22 kbps Tx / 88 kbps Rx
- 100Base-T Ethernet and RS-232 interfaces
- Configurable as Wi-Fi hotspot
- Data transfer for large files, imagery, etc.
- Browser-based Configuration Interface
- Compatible with Commercial and DoD SIM cards
- Ruggedized & IP67 Compliant

Preliminary Specifications (Available in late 2020)

Dimensions:	8.4" L x 2.7" W x 1.4" D
Weight:	~14 oz
I/O Interface:	DB-25 (custom pinout for RS-232, Ethernet, Power), Wi-Fi
Cooling:	Natural convection
Enclosure:	Hard-Anodized Aluminum (EMI Shielded)
Operating Temperature:	-20°C to +50°C
Input Voltage:	10-32V DC
Current:	<1.75A @ 12V Input